



DESCRIPTION

AMCOM's AM001036PA-P2 is a Power Amplifier module. It is designed for general purpose applications. It operates from 20 MHz to 1000 MHz. The module operates using a +24V supply and uses SMA connectors for input and output.



FEATURES

- Frequency Range: 20-1000MHz
- Gain: 40dB
- Pout: +36dBm
- IP3: +47dBm
- Noise Figure: 6dB
- DC Power: +24V
- SMA Connector

Performance measured @ 500MHz

APPLICATIONS

- Wireless Infrastructure
- Military & Aerospace
- Test and Measurement


Electrical Specifications @ +25 °C, $Z_{IN} = Z_{OUT} = 50 \Omega$, $V_{SUPPLY} = +24V$

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	20		1000
Small Signal Gain S21	dB	38	40	
Gain Flatness	dB		±0.5	±0.8
Output Power P_{out} @ $P_{in} = 0dBm$	dBm	+35	+36	
Output Power P_{3dB} f = 500MHz	dBm	+38	+40	
IP3 f = 500MHz	dBm	+43	+47	
IMD3 (Two Tone +20dBm Output)	dBc	45	48	
Reverse Isolation S12 f = 500MHz	dB	-45	-50	
Noise Figure f = 500MHz	dB		6.0	7.0
Efficiency	%	28	32	
Pout = +36dBm f = 500MHz				
Input VSWR S11 f = 500MHz			1.5:1	2.0:1
Output VSWR S22 f = 500MHz			1.5:1	2.0:1
DC Power Supply	V	18	24	+28
Supply Current (Quiescent)	mA		630	670
Weight	Oz.		9	


Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency




Noise Figure vs Frequency

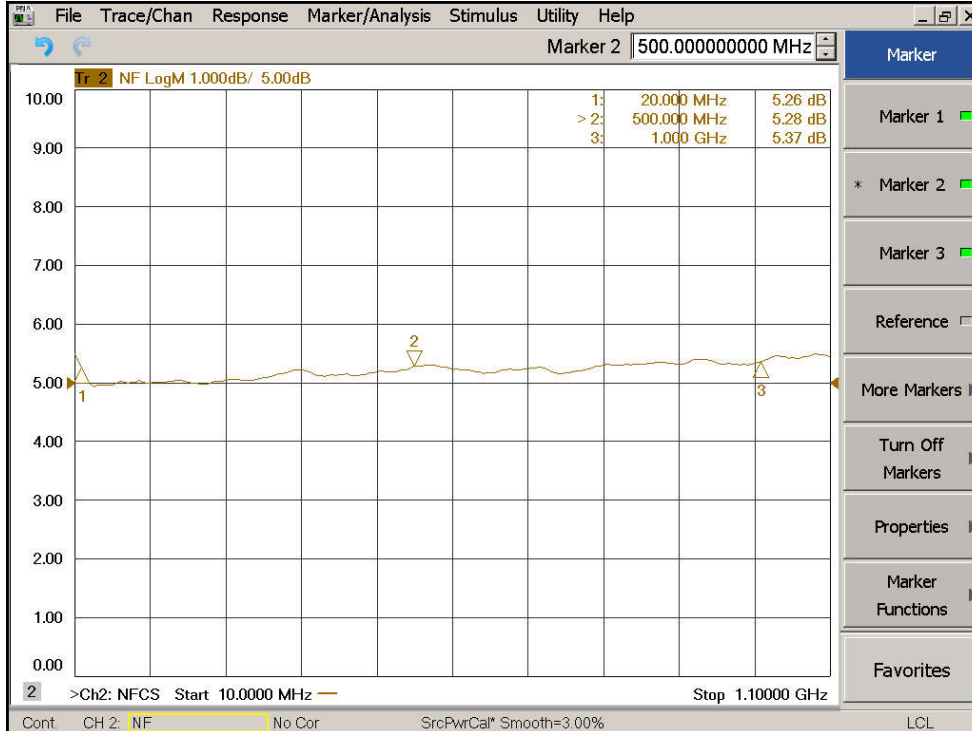

Output P1dB vs Frequency

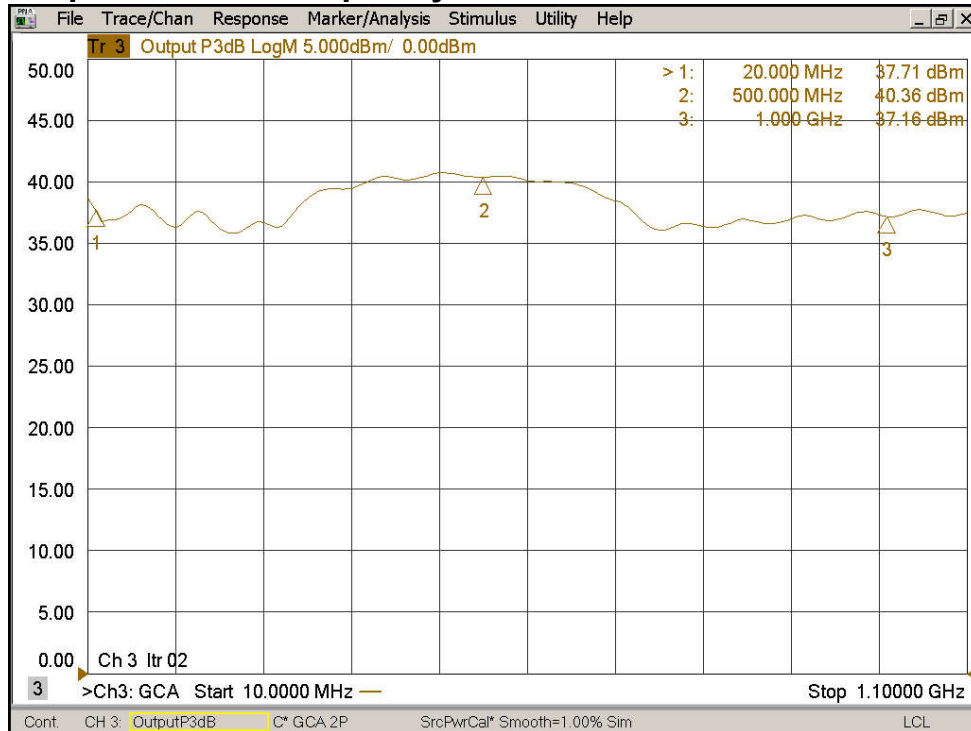







Output IP3 vs Frequency

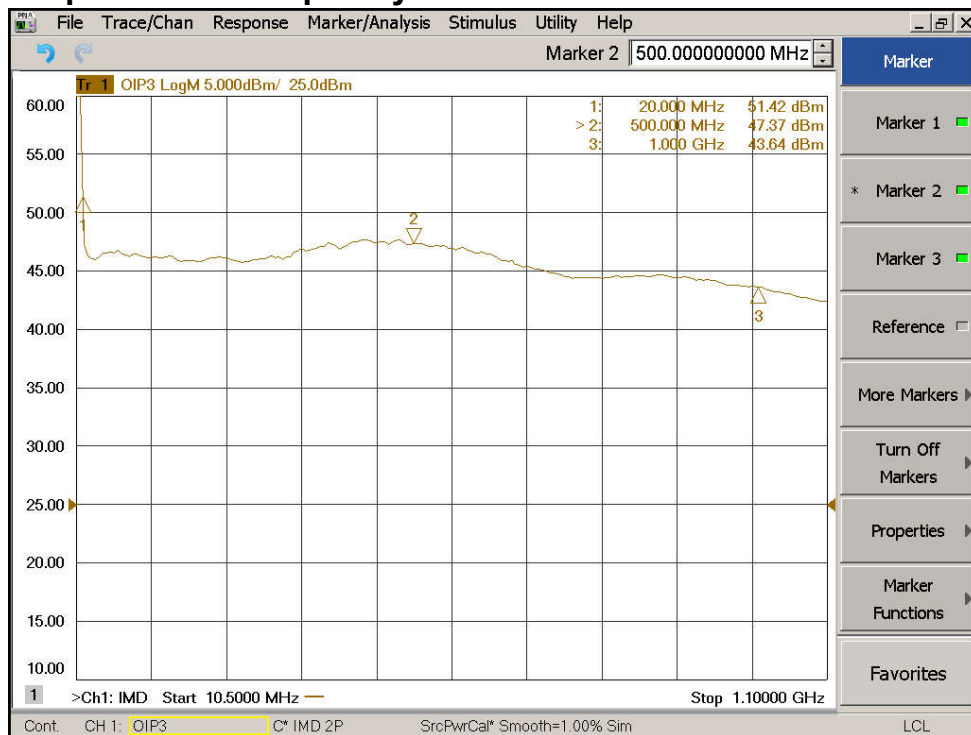







Broadband Performance









Typical Performance @ +25°C

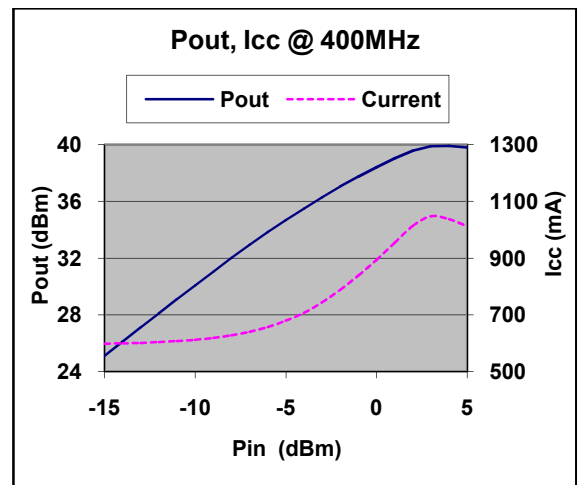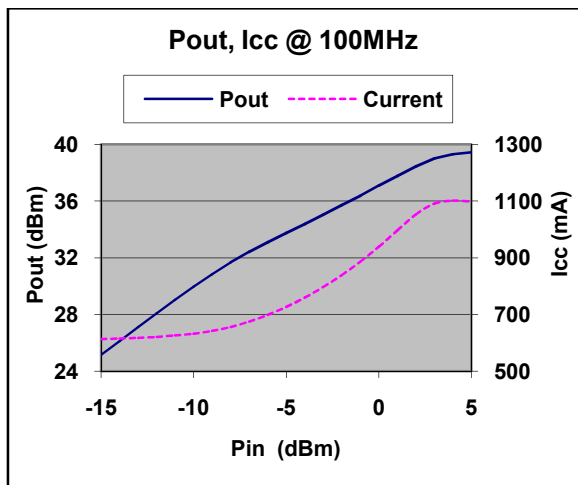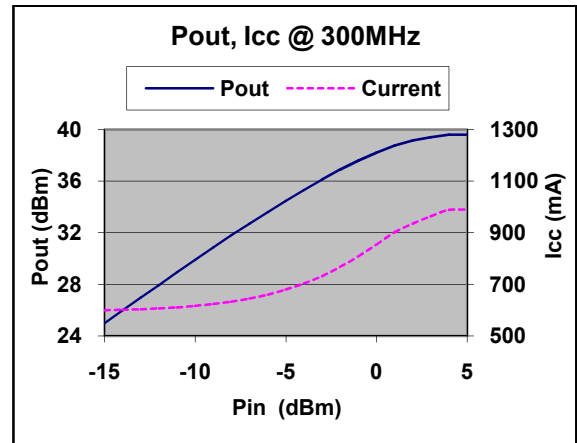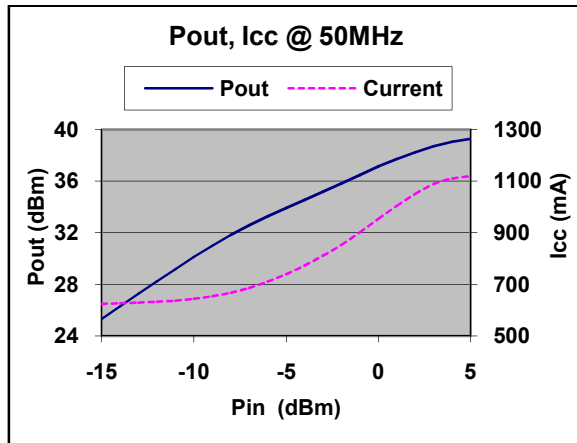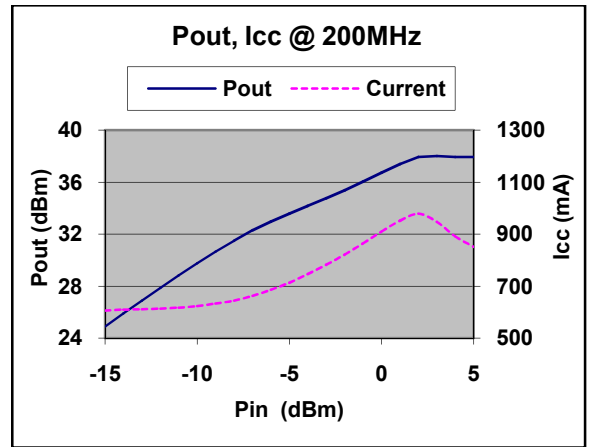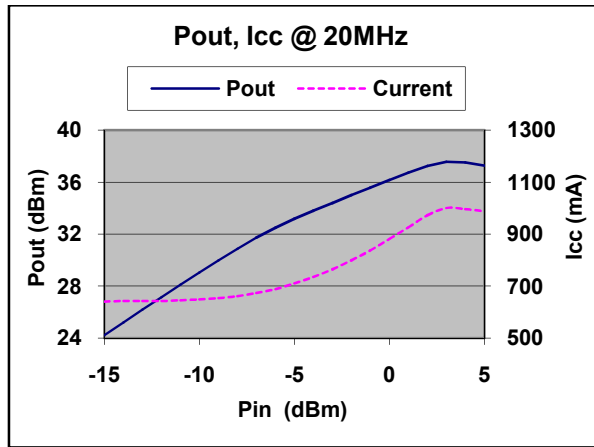

Typical Performance @ +25°C

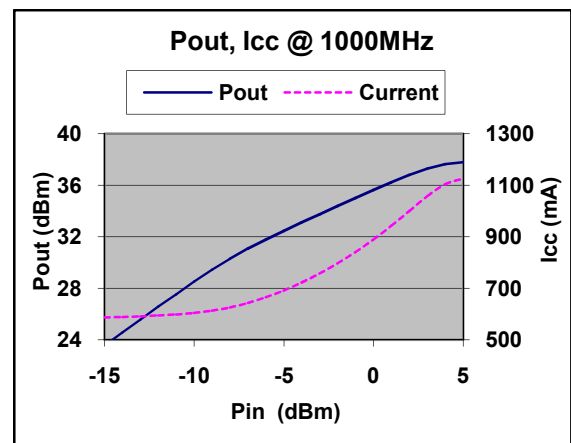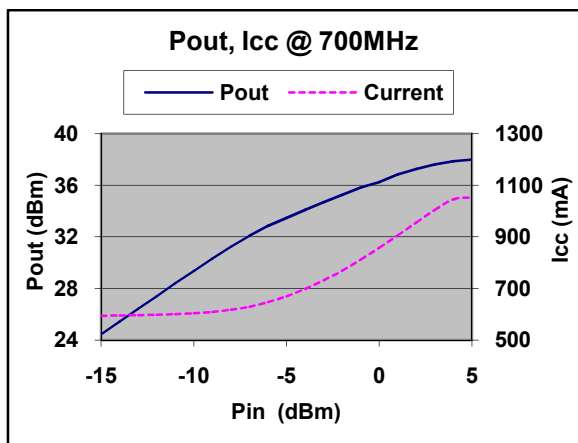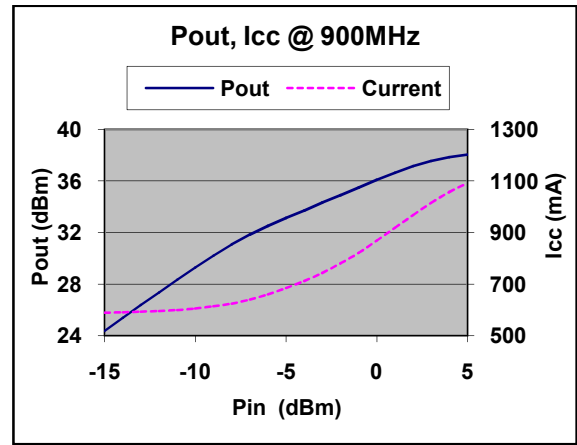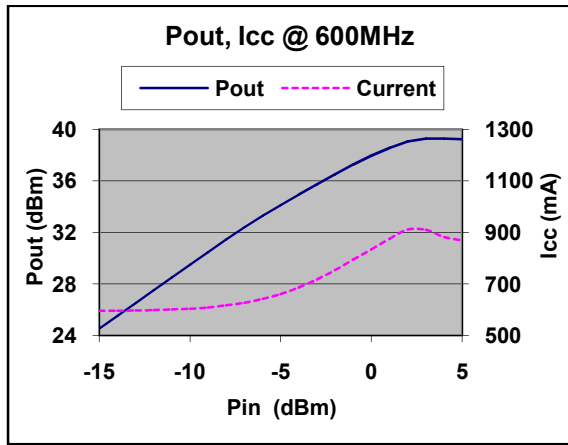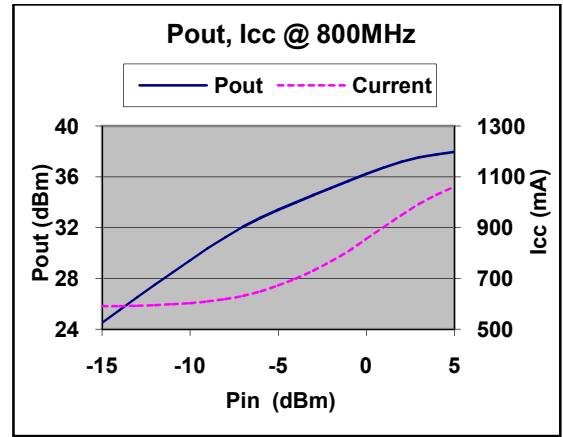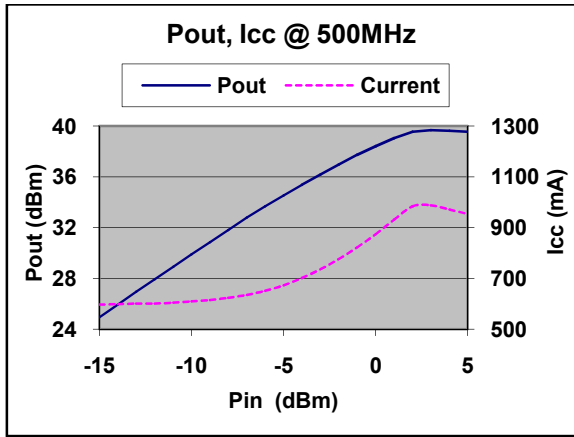

Typical Performance @ +25°C

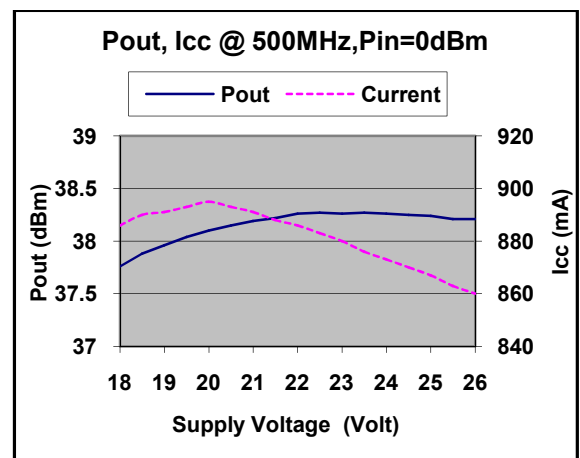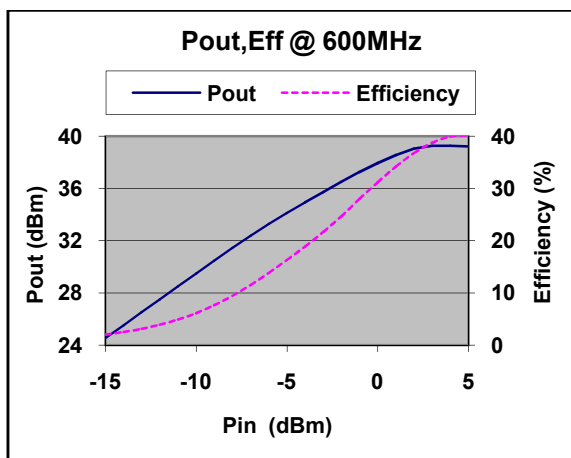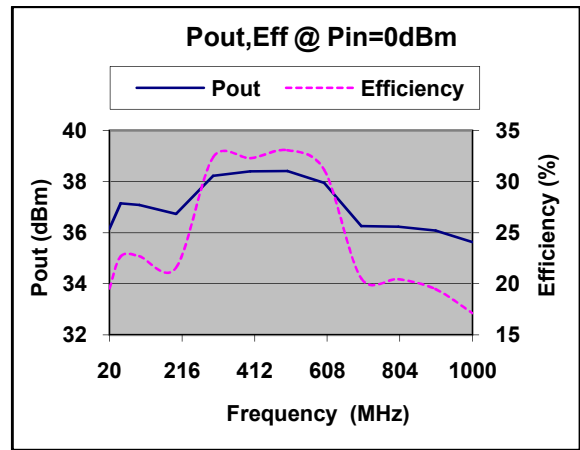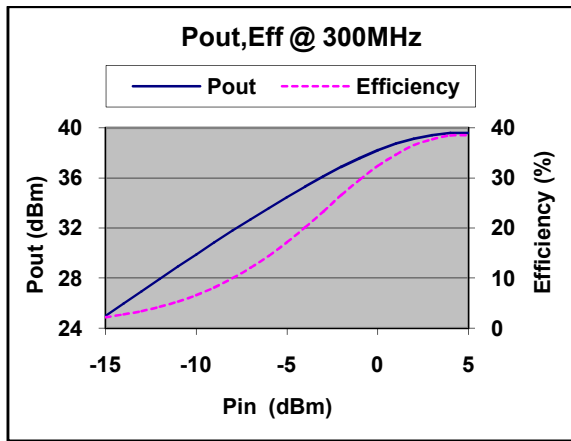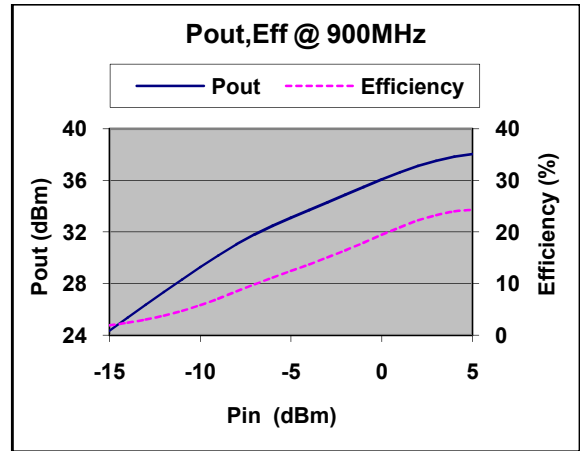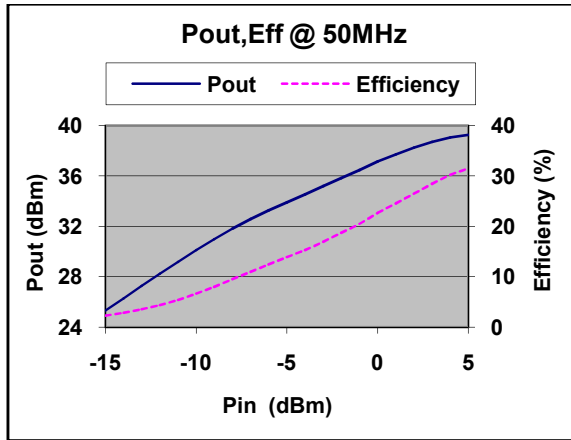




Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
DC Supply Voltage	+28V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

ESD Sensitive Material



Outline

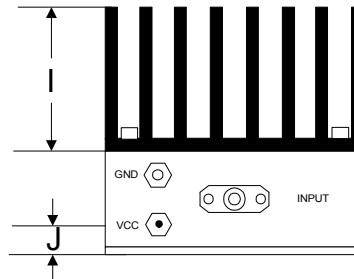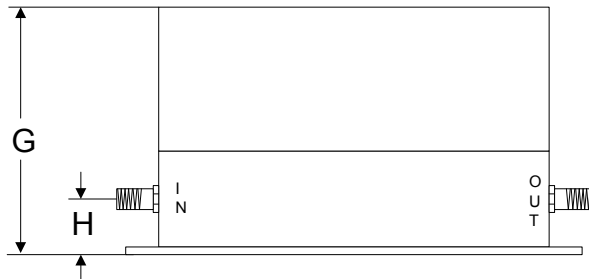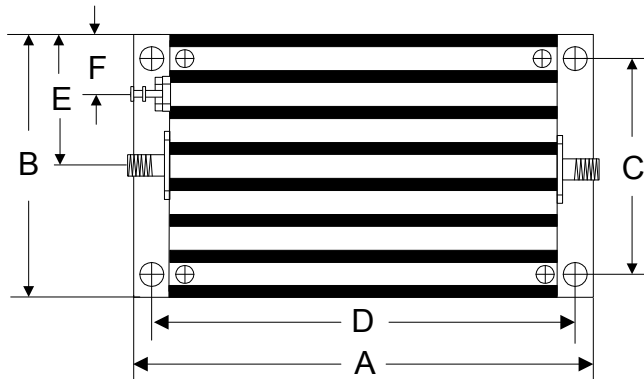

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.813	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	46.05	9.53	25.40	6.03