



## DESCRIPTION

AMCOM's AM002212XD-P3 is a high IP3 passive double balanced mixer operates with LO drive level range of +14dBm to +20dBm.



## FEATURES

- LO/RF: 10-2200MHz
- IF: DC-1800MHz
- LO Level: +17dBm
- Conversion Loss: 6.5dB
- RF Input: Up to +12dBm
- Input IP3: +25dBm
- SMA Connector

## APPLICATIONS







- Telecom Infrastructure
- Military & Aerospace
- VSAT
- Test & Instrumentation
- Radar
- Communication

## Electrical Specifications @ +25°C, LO=+17dBm, 50 Ω

Unless otherwise noted, all measurements performed as a downconverter.

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range				
LO/RF	MHz	10		2200
IF	MHz	DC		1800
Conversion Loss	dB		6.5	8.0
LO-RF Isolation	dB	25	32	
LO-IF Isolation	dB	28	35	
RF-IF Isolation	dB	25	30	
RF Input Power P <sub>1dB</sub>	dBm		+12	
IP3 (Center Band)	dBm		+25	


Typical Performance @ +25 °C

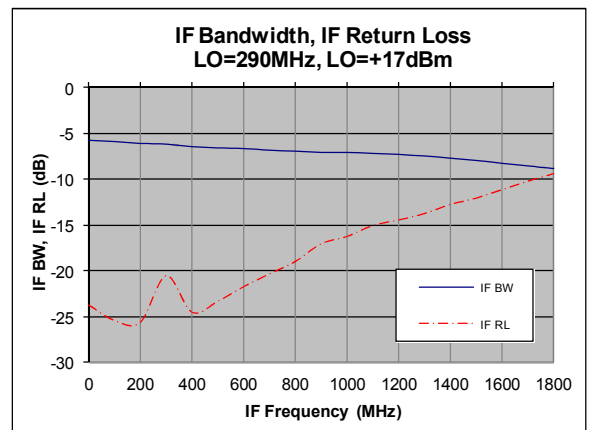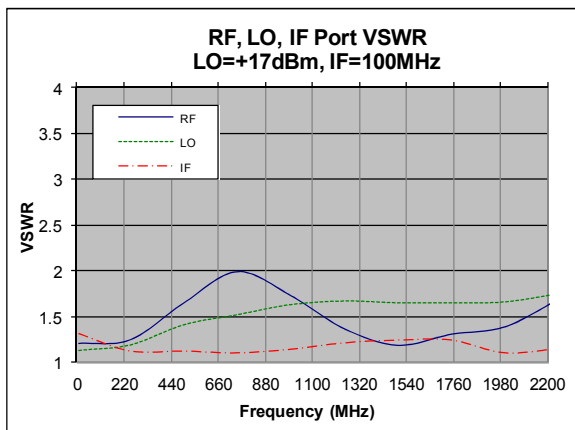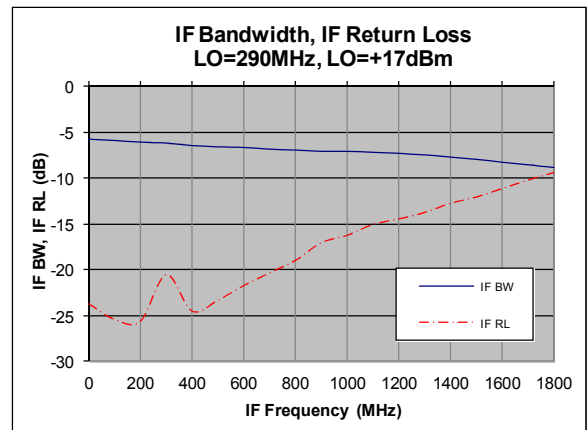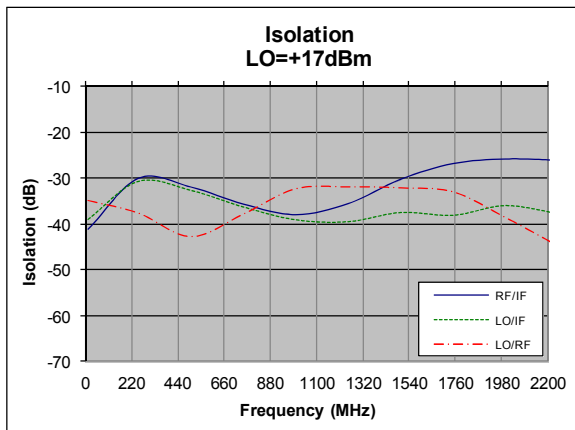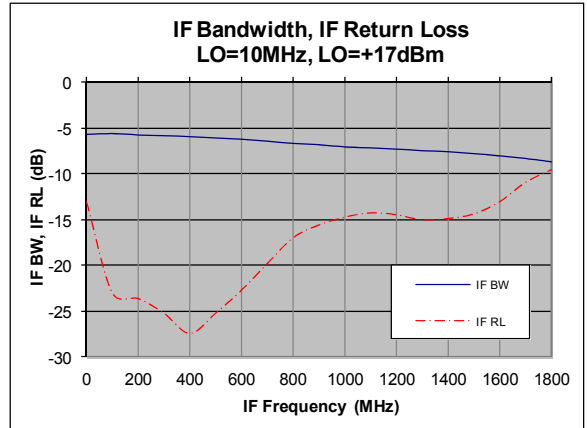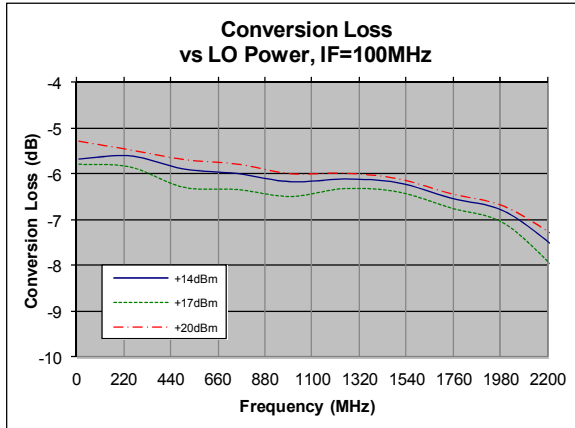


**Absolute Maximum Ratings**

Parameter	Absolute Maximum
RF/IF Power	+23dBm
LO Power	+23dBm
Peak IF Current	40mA
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

**Schematic**

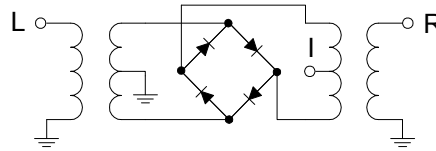

**Outline**

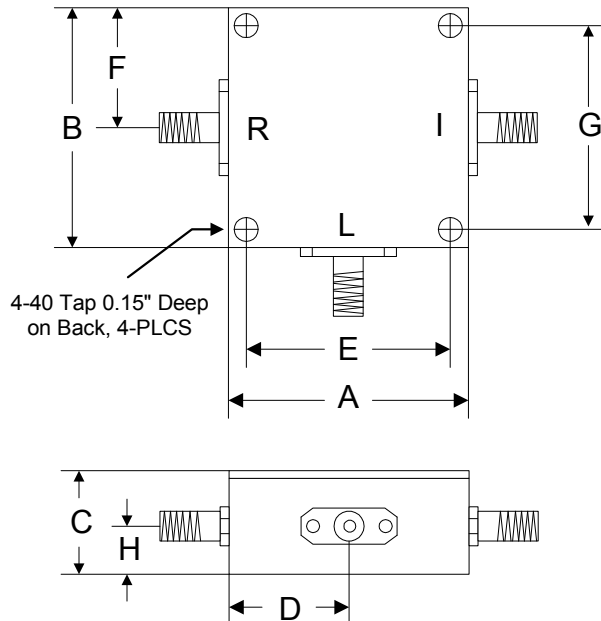

	A	B	C	D	E	F	G	H
Inch	1.250	1.250	0.563	0.625	1.000	0.625	1.000	0.250
mm	31.75	31.75	14.29	15.88	25.40	15.88	25.40	6.35