

DESCRIPTION

AMCOM's AM232630PA-P2 is a Power Amplifier module. It is designed for general purpose applications. It operates from 2300 MHz to 2600 MHz. The module operates using a +12V supply and uses SMA connectors for input and output.



FEATURES

- Frequency Range: 2300-2600MHz
- Gain: 30dB
- Pout: +30dBm (1Watt)
- IP3: +40dBm
- Noise Figure: 8dB
- DC Power: +12V
- DC Reverse Protected
- Internal Voltage Regulated
- SMA Connector


APPLICATIONS

- Wireless Infrastructure
- Military & Aerospace
- Test and Measurement


Electrical Specifications @ +25°C, $Z_{IN} = Z_{OUT} = 50\Omega$, DC Supply = +12V

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	2300		2600
Small Signal Gain S_{21} $f = 2450\text{MHz}$	dB	29	30	
Gain Flatness	dB		± 0.6	± 1.0
Output Power P_{1dB} $f = 2450\text{MHz}$	dBm	+30	+31	
Output IP3 $f = 2450\text{MHz}$	dBm	+40	+41	
Reverse Isolation S_{12}	dB	-47	-50	
Noise Figure	dB		8.0	9.5
VSWR Input VSWR S_{11}			2.5:1	3.0:1
Output VSWR S_{22}			1.5:1	3.8:1
DC Power Supply	V	9	12	15
Quiescent Current with No Input	mA		300	400
Current @ $P_{out} = +30\text{dBm}$	mA		1200	1500
Size (Excluding SMA Connector)	inch	3.750" x 2.000" x 1.813"		
Weight	Oz.	8		


Gain S21, Isolation S12, Return Loss S11, S22 vs Frequency

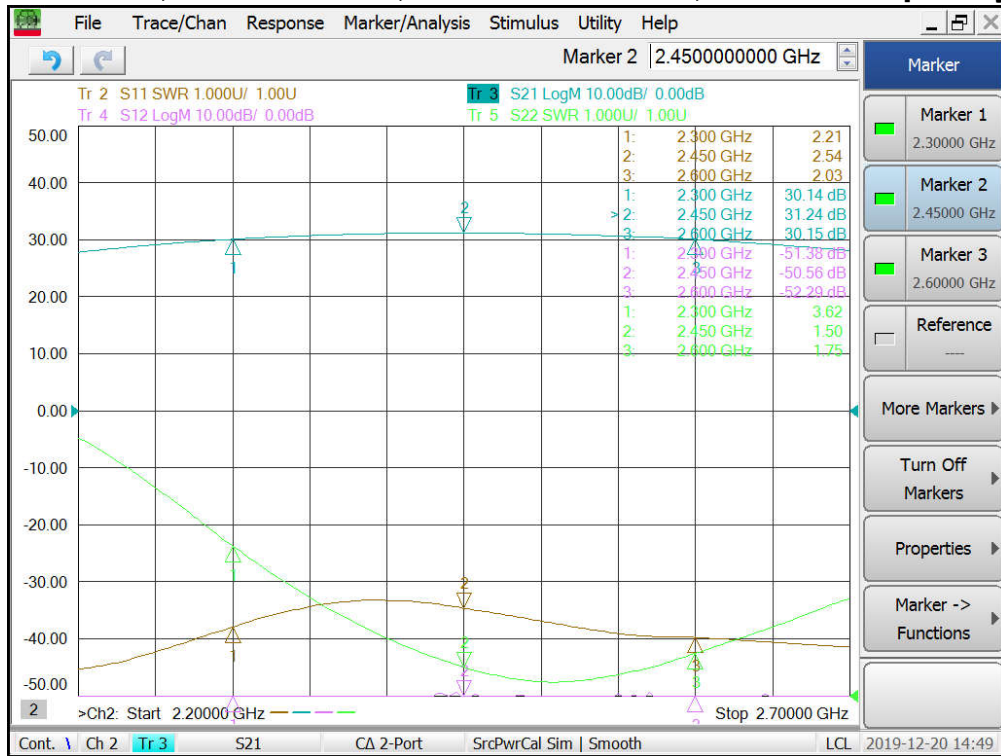


Noise Figure vs Frequency

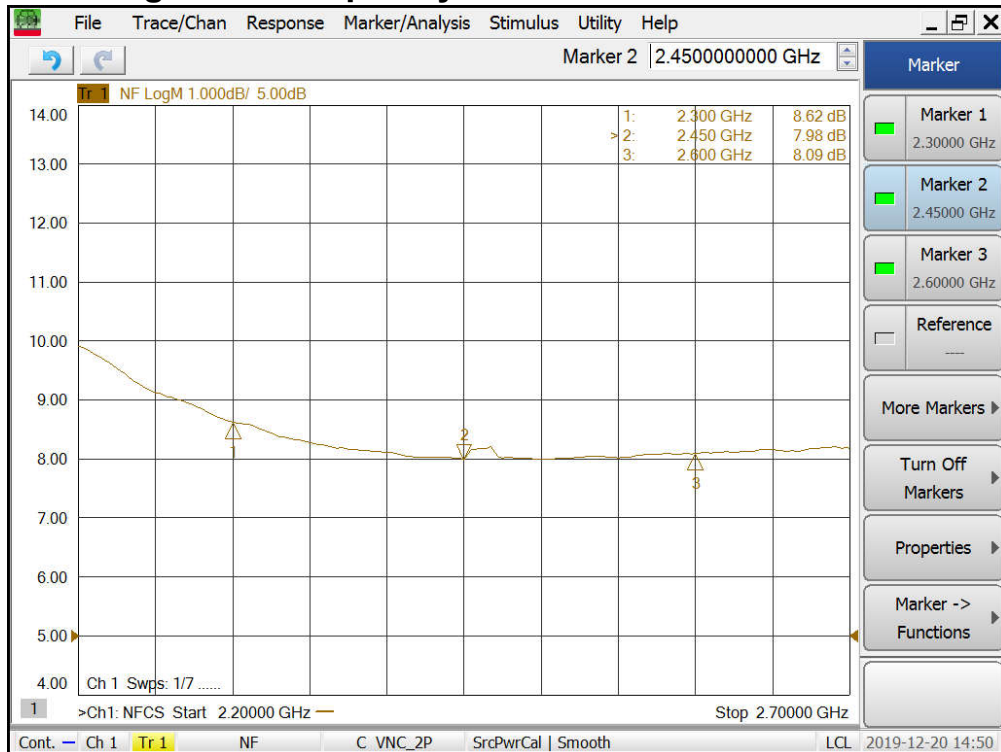

Output P1dB vs Frequency

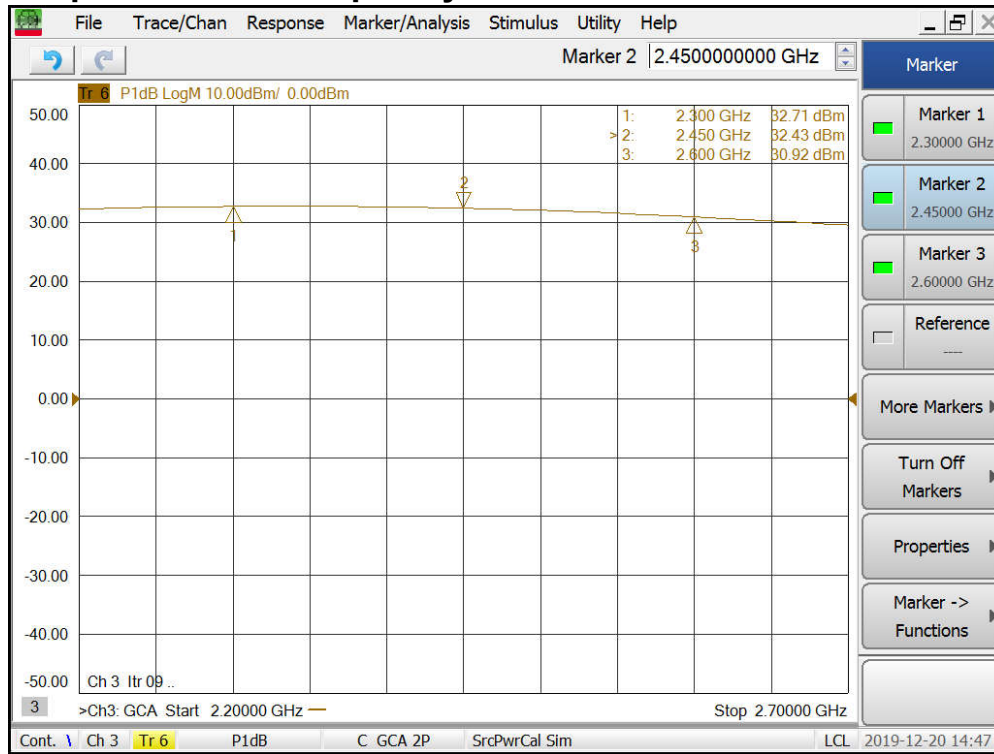

Output IP3 vs Frequency

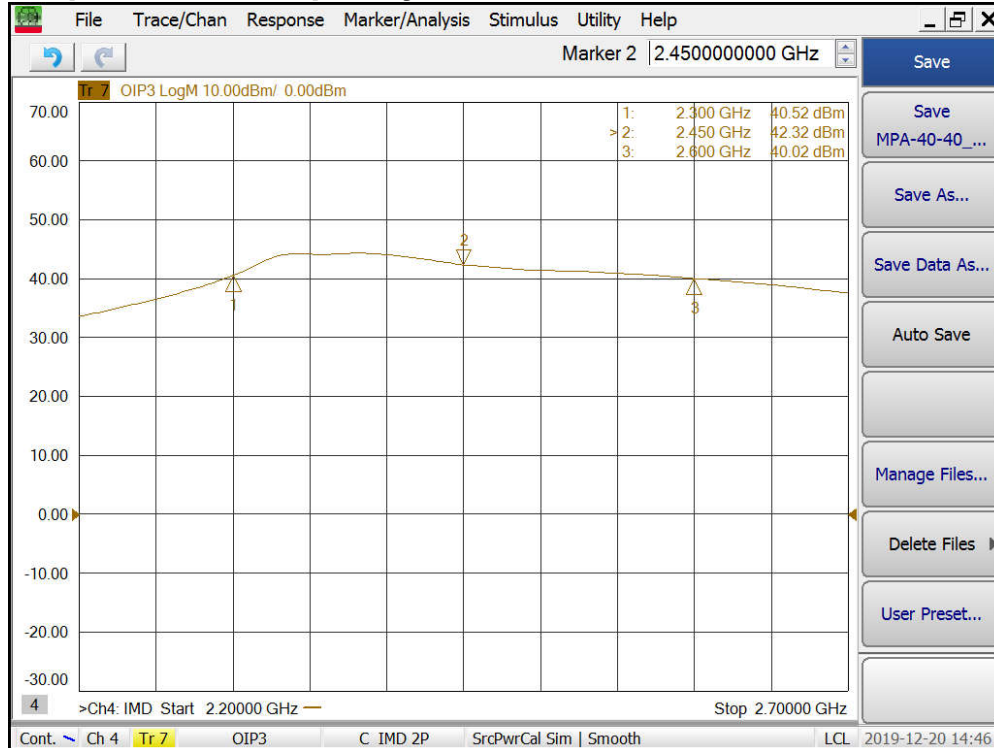




Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
DC Supply Voltage	+18V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

ESD Sensitive Material



Outline

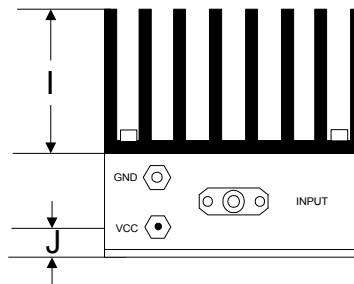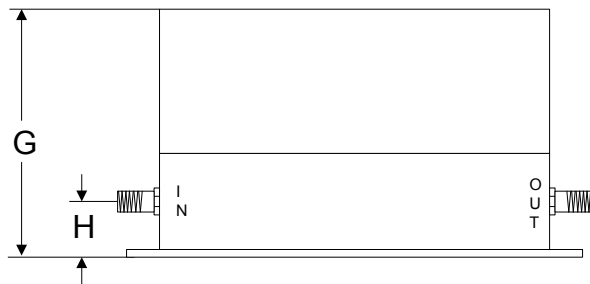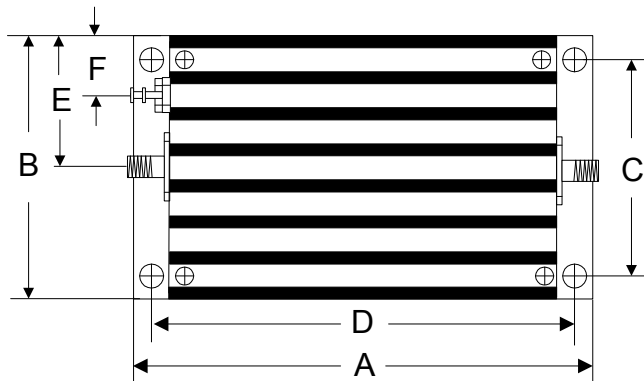

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.813	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	46.05	9.53	25.40	6.03