



## DESCRIPTION

AMCOM's AM020408LN-P1 is a broadband Low Noise Amplifier module. It is designed for general purpose applications. It operates from 225 MHz to 400 MHz with Noise Figure of 0.8 dB and small signal gain of 21 dB. The module operates using a 7 – 15V supply and uses SMA connectors for input and output. This amplifier module is compact at 1.25" (L) x 1.25" (W) x 0.563" (H).



## FEATURES

- Frequency Range: 225-400MHz
- Gain: 21dB
- P<sub>1dB</sub>: +17dBm
- IP3: +35dBm
- Noise Figure: 0.8dB
- DC Power: 7 - 15V
- SMA Connector







## APPLICATIONS

- Wireless Infrastructure
- Military & Aerospace
- Test and Measurement

## Electrical Specifications @ +25 °C

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	225		400
Gain	dB		21	
Gain Flatness	dB		± 0.3	
P <sub>1dB</sub>	dBm		+17	
IP3	dBm		+35	
Noise Figure	dB		0.8	
Reverse Isolation	dB		-26	
VSWR				
Input VSWR			1.2:1	
Output VSWR			1.4:1	
DC Power Supply	V	7	12	15
Supply Current	mA		75	


Typical Performance @ +25 °C

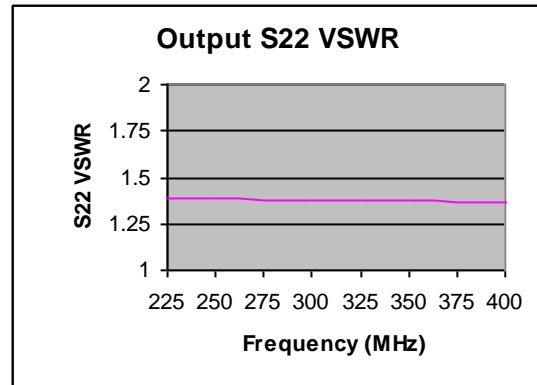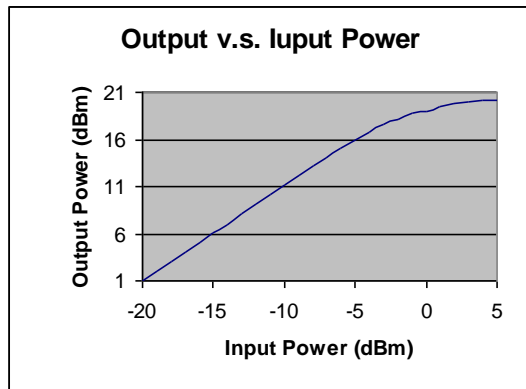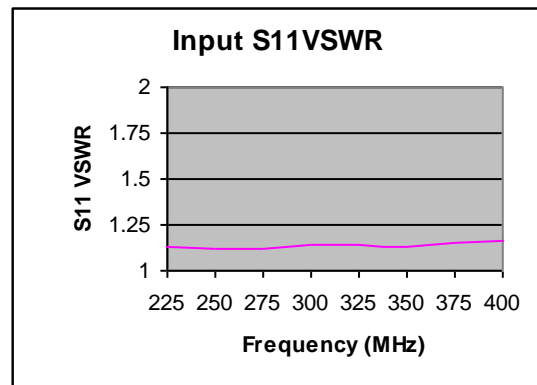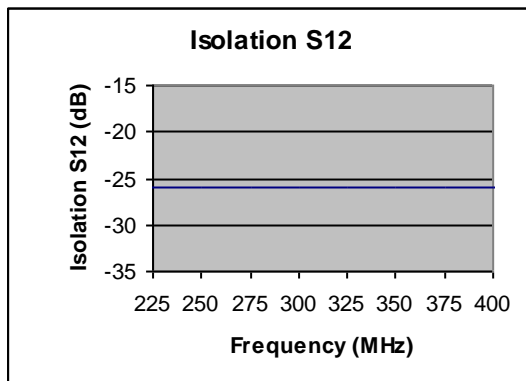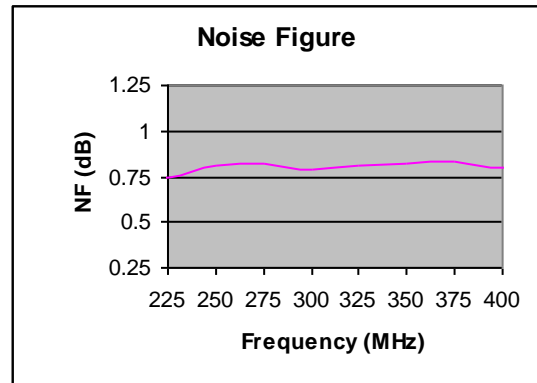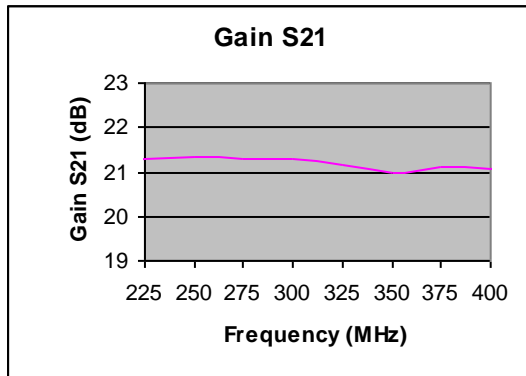

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+13dBm
Supply Voltage	+25V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +125 °C

### Outline

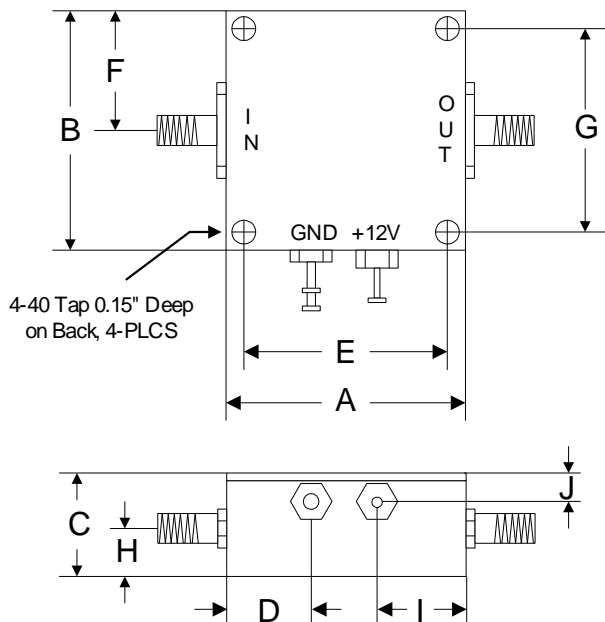

	A	B	C	D	E	F	G	H	I	J
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76