


VGS005-5.0



ORDER CODE

VGS005-5.0	-	XXP	-	1Y	-	00A
Serie	no. of poles	pitch /color	special			
	02 ~24P	1 = single pitch 2 = double pitch	A = customized			

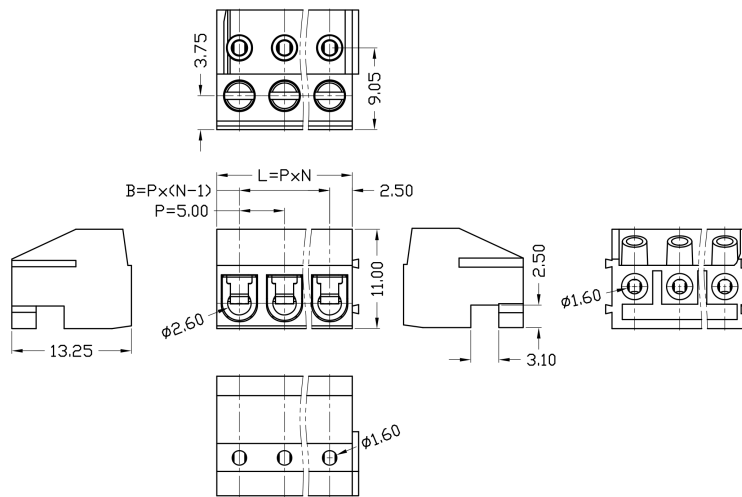

Y:	
1 = green	6 = red
2 = blue	7 = transparent
3 = black	8 = white
4 = grey	9 = yellow
5 = orange	Y = mixed (on request)

TECHNICAL DATA

Test Standard	IEC 60998-2-1 / UL 1059		
Pitch [mm]	5.00		
No. of Poles	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	250		
Rated Current [A]	12		
Rated Connection Capacity (Solid / standed) [mm ²]	1.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequent Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	0.4		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	./.	300
Rated Current [A]	15	./.	10
Rated Connection Capacity (Solid / standed) [AWG]	26 ~ 14		
Rated Torque [N.m]	3.54		
OTHER DATA			
Ambient Temperature [°C]	-30°C ~ +120°C		
Stripping length	5 ~ 6		
Plastic Material Imflammability Class	PBT UL94 V-0		
Screw/ Material/ Plating	M2.5/ Steel / zine plating		
Conductor Material/ plating	(Copper alloy)/ Nickel plated		
Clamp/ plating	Phosphor bronze / Nickel plated		