


**RoHS** 



**ORDER CODE**

<b>VSB25C-7.62</b>	-	XXP	-	1Y	-	00A
Serie	no. of poles 02 ~24P	pitch /color 1 = single pitch 2 = double pitch	special A = customized			
Y: 1 = green                      6 = red 2 = blue                      7 = transparent 3 = black                      8 = white 4 = grey                      9 = yellow 5 = orange                      Y = mixed (on request)						

300V 15A  
22-14 AWG

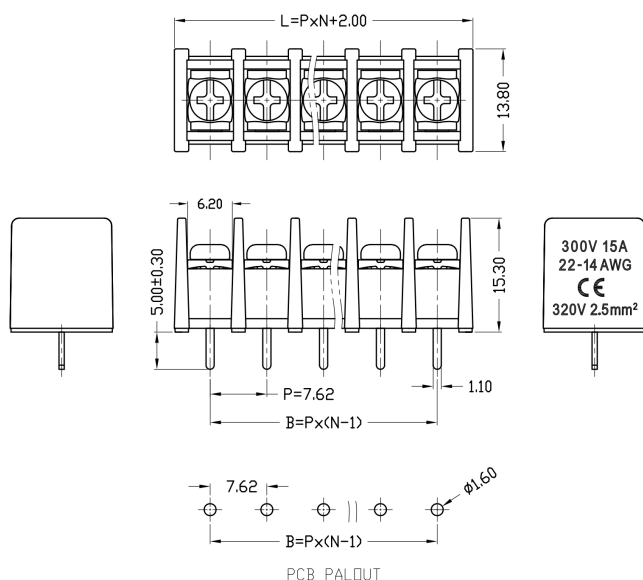

**TECHNICAL DATA**

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	7.62		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	320		
Rated Current [A]	24		
Rated Connection Capacity (Solid / standed) [mm <sup>2</sup> ]	2.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	0.5		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	22 ~ 14		
Rated Tourque [N.m]	4.43		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		