



RoHS 



ORDER CODE

VS25CW-7.62	-	XXP	-	1Y	-	00A
Series		no. of poles 02 ~24P		pitch /color 1 = single pitch 2 = double pitch		special A = customized
				Y:		
				1 = green	6 = red	
				2 = blue	7 = transparent	
				3 = black	8 = white	
				4 = grey	9 = yellow	
				5 = orange	Y = mixed (on request)	

CE
320V 2.5mm²
300V 15A
22-14 AWG

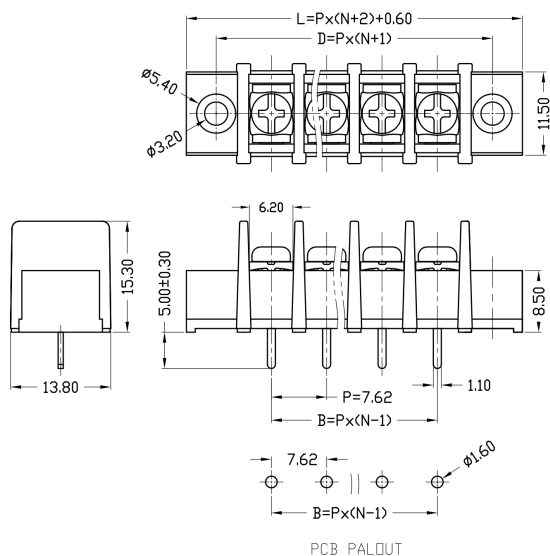

TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	7.62		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	320		
Rated Current [A]	24		
Rated Connection Capacity (Solid / standed) [mm ²]	2.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	0.5		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	22 ~ 14		
Rated Tourque [N.m]	4.43		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		