



**RoHS** 



**ORDER CODE**

<b>VSB25S-7.62</b>	-	XXP	-	1Y	-	00A
Serie	no. of poles	pitch /color	special			
	02 ~24P	1 = single pitch 2 = double pitch	A = customized			
		Y:				
		1 = green	6 = red			
		2 = blue	7 = transparent			
		3 = black	8 = white			
		4 = grey	9 = yellow			
		5 = orange	Y = mixed (on request)			

300V 15A  
22-14 AWG

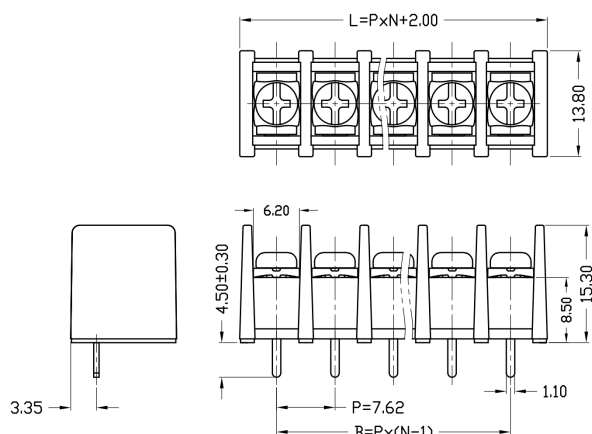

PCB PALOUT

**TECHNICAL DATA**

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	7.62		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	320		
Rated Current [A]	24		
Rated Connection Capacity (Solid / standed) [mm <sup>2</sup> ]	2.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	0.5		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	22 ~ 14		
Rated Tourque [N.m]	4.43		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		