

VS25SW-7.62

RoHS 




ORDER CODE

VS25SW-7.62	-	XXP	-	1Y	-	00A
--------------------	---	------------	---	-----------	---	------------

Series	no. of poles	pitch /color	special
	02 ~24P	1 = single pitch 2 = double pitch	A = customized

Y:	
1 = green	6 = red
2 = blue	7 = transparent
3 = black	8 = white
4 = grey	9 = yellow
5 = orange	Y = mixed (on request)

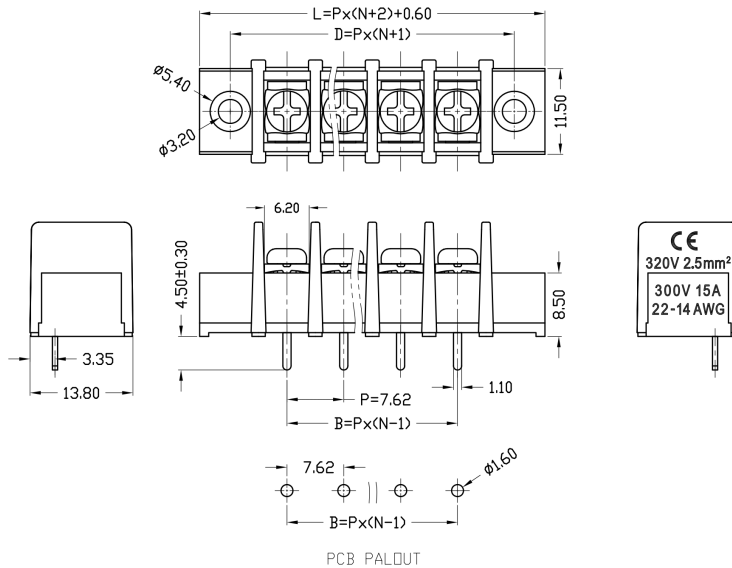

PCB PALOUT

TECHNICAL DATA

Test Standard	IEC 60998-2-1 / UL 1059		
Pitch [mm]	7.62		
No. of Poles	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	320		
Rated Current [A]	24		
Rated Connection Capacity (Solid / stranded) [mm ²]	2.5		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequent Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	1.2.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / stranded) [AWG]	22 ~ 14		
Rated Torque [N.m]	10.53		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Flammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		