

VSB55H-10.0

RoHS CE




ORDER CODE

VSB55H-10.0	-	XXP	-	1Y	-	00A
-------------	---	-----	---	----	---	-----

Series	no. of poles 02 ~ 24P	pitch / color 1 = single pitch 2 = double pitch	special A = customized
--------	--------------------------	---	---------------------------

Y:	
1 = green	6 = red
2 = blue	7 = transparent
3 = black	8 = white
4 = grey	9 = yellow
5 = orange	Y = mixed (on request)

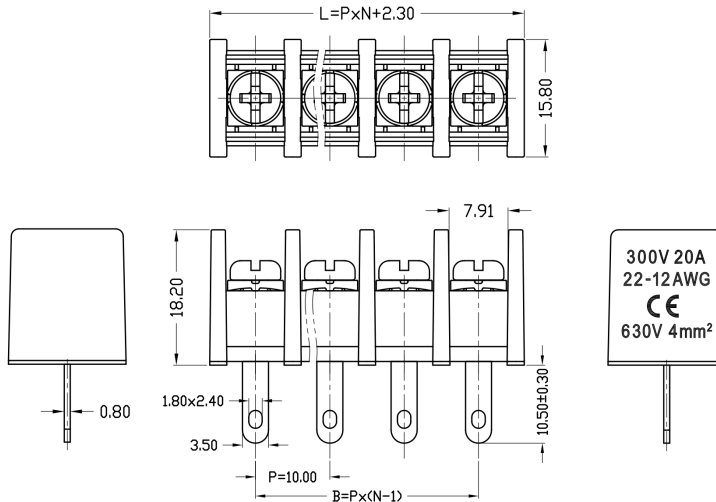

TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	10.0		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	630		
Rated Current [A]	32		
Rated Connection Capacity (Solid / standed) [mm ²]	4.0		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	1.2.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	20	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	22 ~ 12		
Rated Tourque [N.m]	10.53		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		