


# VSB635S-6.35

RoHS



## ORDER CODE

VSB635S-6.35	-	XXP	-	1Y	-	00A
Serie	no. of poles	pitch /color	special			
	02 ~24P	1 = single pitch 2 = double pitch	A = customized			
Y:						
1 = green			6 = red			
2 = blue			7 = transparent			
3 = black			8 = white			
4 = grey			9 = yellow			
5 = orange			Y = mixed (on request)			

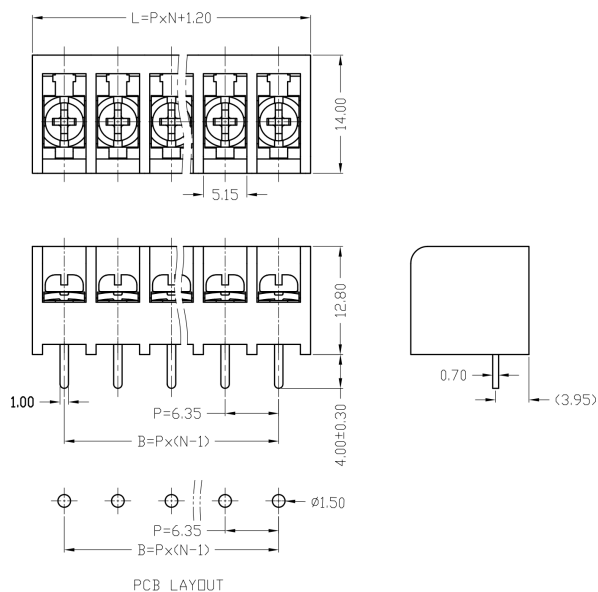

## TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	6.35		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	250		
Rated Current [A]	17.5		
Rated Connection Capacity (Solid / standed) [mm <sup>2</sup> ]	1.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	0.5		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	22 ~ 16		
Rated Tourque [N.m]	4.43		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		