


# VSB944-9.0


**RoHS** 



## ORDER CODE

<b>VSB944-9.0</b>	-	XXP	-	1Y	-	00A
Serie	no. of poles	pitch /color	special			
	02 ~24P	1 = single pitch 2 = double pitch	A = customized			
Y:						
1 = green		6 = red				
2 = blue		7 = transparent				
3 = black		8 = white				
4 = grey		9 = yellow				
5 = orange		Y = mixed (on request)				

  
300V 20A

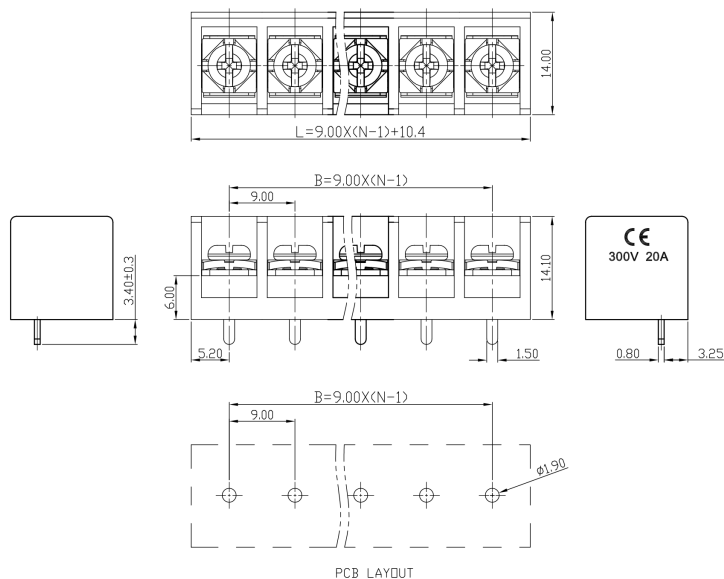

## TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	9.00		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	630		
Rated Current [A]	32		
Rated Connection Capacity (Solid / standed) [mm <sup>2</sup> ]	4.0		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	6000		
Rated Torque	1.2.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	22 ~ 12		
Rated Tourque [N.m]	10.53		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		