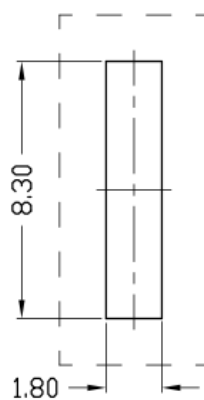
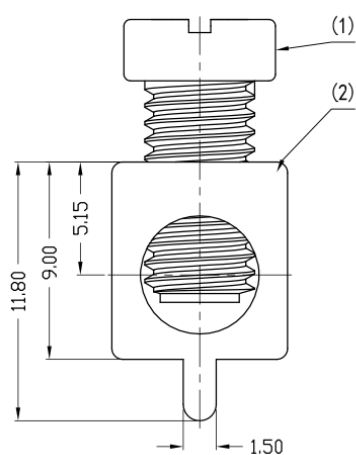

**ORDER CODE**

VSKC001	-	00A
Serie		special A = customized

**PCB LAYOUT****TECHNICAL DATA**

Test Standrad	IEC 60998-2-1 / UL 1059
Rated Current [A]	65
Rated Connection Capacity (Solid / stranded) [AWG]	18 ~ 6
Rated Torque [N.m]	2.0
OTHER DATA	
Ambient Temperature [°C]	-40°C ~ +120°C
Stripping length	7 ~ 8 mm
Block (2)	Brass / tin plated
Screw Specification Material/ Plating (1) (M5 x0.8P)	Steel / Sn plated