
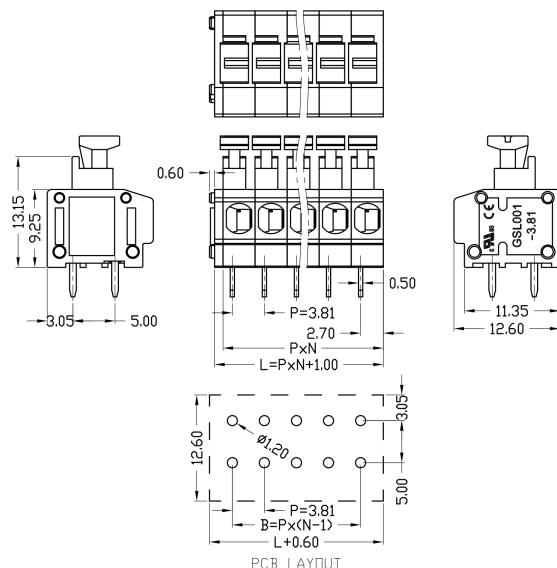


# VSL001-3.81

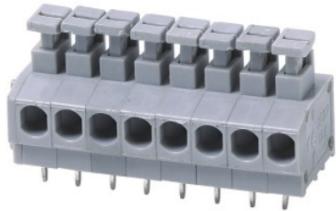

## ORDER CODE

VSL001- 3.81	-	XXP	-	1Y	-	00A
Serie		no. of poles 02 ~ 24P		pitch /color 1 = single pitch 2 = double pitch		special A = customized
Y:						
1 = green						6 = red
2 = blue						7 = transparent
3 = black						8 = white
4 = grey						9 = yellow
5 = orange						Y = mixed (on request)

## TECHNICAL DATA

Test Standard	IEC 60998-2-1 / UL 1059		
Pitch [mm]	3.81		
No. of Poles	02 ~ 24 P		
<b>IEC 60998-2-1</b>			
Rated Insulation Voltage [V]	250		
Rated Current [A]	10		
Rated Connection Capacity (Solid / stranded) [mm <sup>2</sup> ]	2.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 2000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	/.		
<b>UL 1059</b>			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	/.	300
Rated Current [A]	5	/.	5
Rated Connection Capacity (Solid / stranded) [AWG]	20 ~ 18		
Rated Tourque [N.m]	/.		
<b>OTHER DATA</b>			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	9 ~ 10mm		
Plastic Material Flammability Class	PA66 UL94 V-2		
Screw / fixing hole Specification Material/ Plating	/.		
Conductor Material / Plating	Copper Alloy/ Sn plated		
Clamp/ plating	Stainless Steel		