


VSL008-5.0

VISIONCON.
Connector Systems & Solutions

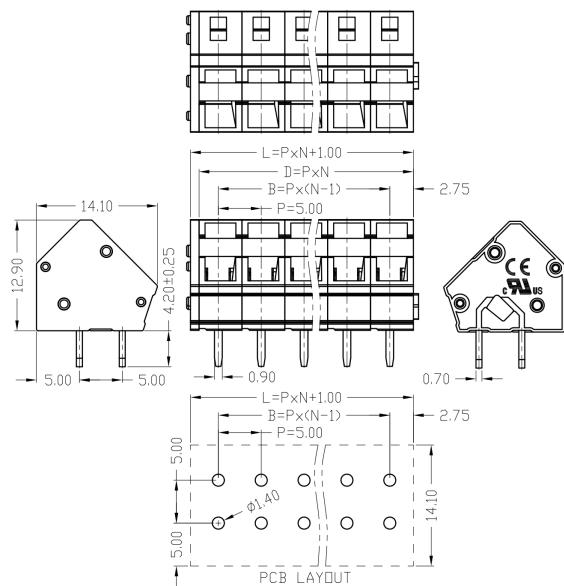

ORDER CODE

VSL008-5.0	-	XXP	-	1Y	-	00A
Serie		no. of poles		pitch /color		special
		02 ~ 24P		1 = single pitch	A = customized	
				2 = double pitch		
Y:						
1 = green		6 = red				
2 = blue		7 = transparent				
3 = black		8 = white				
4 = grey		9 = yellow				
5 = orange		Y = mixed (on request)				

TECHNICAL DATA

Test Standard	IEC 60998-2-1 / UL 1059		
Pitch [mm]	5.00		
No. of Poles	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	450		
Rated Current [A]	17		
Rated Connection Capacity (Solid / standed) [mm ²]	2.5.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	/.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	/.	300
Rated Current [A]	15	/.	10
Rated Connection Capacity (Solid / standed) [AWG]	28 ~ 12		
Rated Tourque [N.m]	/.		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	5 ~ 6mm		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw / fixing hole Specification Material/ Plating	/.		
Conductor Material / Plating	Copper Alloy/ Sn plated		
Clamp/ plating	Stainless Steel		