
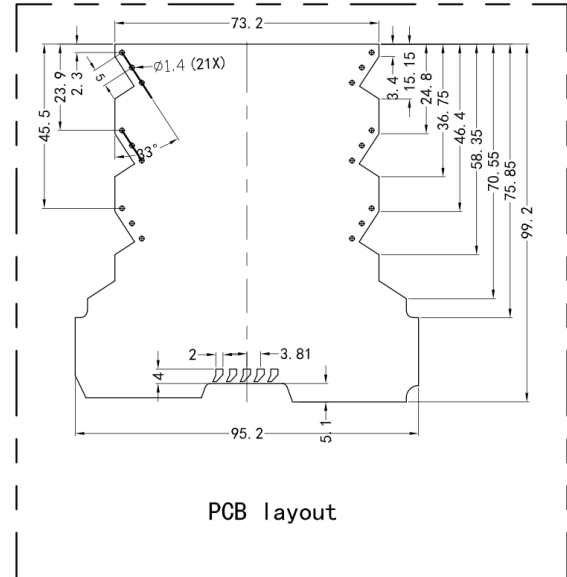


VSMEH-03P-2Y/3Y

ORDER CODE

VSMEH-03P-2Y-(3Y)	-	03P	-	00A
Serie		no. of poles		special
				A = customized

Y = no. of storey

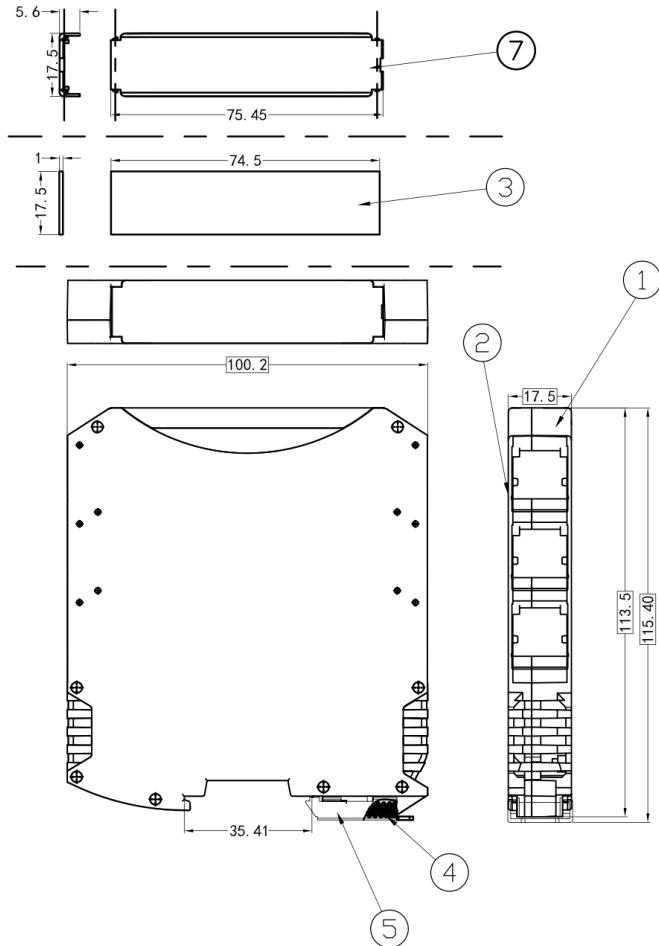

PCB layout

(NO.)	Name	Material	Amount	Surface Treatment
(6)	Blank	PA66 (UL94, V-0)	N	
(5)	Metal slider	steel	1	Ni Plated
(4)	Spring	stainless steel	1	
(3)	Cover	PA66 (UL94, V-0)	1	
(2)	Housing-2	PA66 (UL94, V-0)	1	
(1)	Housing-1	PA66 (UL94, V-0)	1	

Product parameters	
Number OfPcb Supports/PCB	
Pcb Board Thickness/PCB	1mm-1.8mm
Installation Location	Vertical (horizontal) DIN rail
Pcb instalkationType/PCB	Lock
IP (Ingress Protection)/P	IP20
With vent	Yes
Maximum number ofconnections	18(spacing 5.0mm)
Ambient temperature (assembly)	-5° C~+85° C
Ambient temperature (operation)	-40° C~+85° C
Ambient temperature(storage and transportation)	-40° C~+85° C

