



VSO100-7.5



ORDER CODE

VSO100-7.5	-	XXP	-	1Y	-	00A
Serie	no. of poles		pitch /color		special	
	01 ~ 02P		1 = single pitch 2 = double pitch		A = customized	
			Y:			
			1 = green		6 = red	
			2 = blue		7 = transparent	
			3 = black		8 = white	
			4 = grey		9 = yellow	
			5 = orange		Y = mixed (on request)	

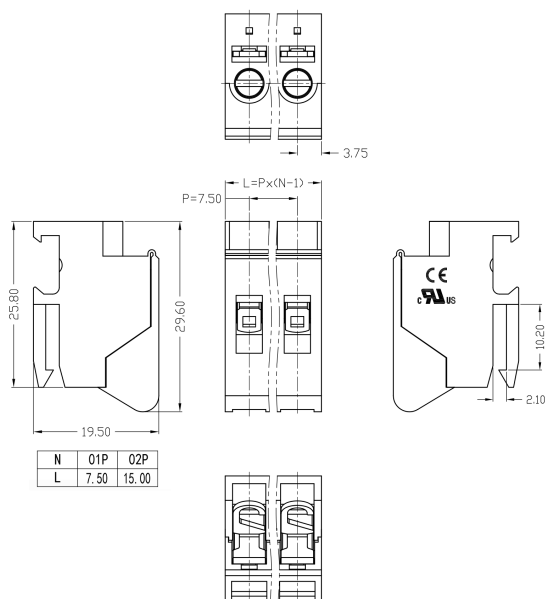

TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	7.62		
No. of Poles	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	750		
Rated Current [A]	32		
Rated Connection Capacity (Solid / standed) [mm ²]	0.5 ~ 4		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequent Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	6000		
Rated Torque	0.8		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	320	300
Rated Current [A]	20	20	10
Rated Connection Capacity (Solid / standed) [AWG]	20 ~ 10		
Rated Tourque [N.m]	7		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	11		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Copper Alloy / Ni plated		
Conductor Material / Plating	Copper Alloy tin plated		