

## VSP001DW-5.08




### ORDER CODE

<b>VSP001DW-5.08</b>	-	XXP	-	1Y	-	00A
----------------------	---	-----	---	----	---	-----

Serie	no. of poles	pitch /color	special
	02 ~24P	1 = single pitch 2 = double pitch	A = customized

Y:	
1 = green	6 = red
2 = blue	7 = transparent
3 = black	8 = white
4 = grey	9 = yellow
5 = orange	Y = mixed (on request)

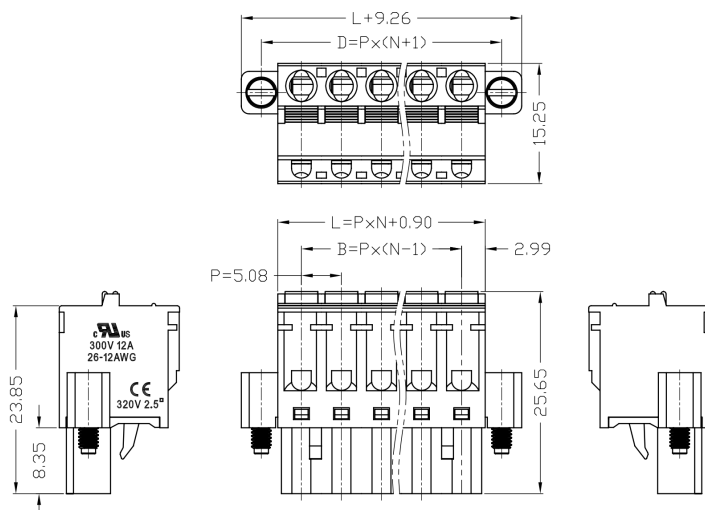

### TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	5.08		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	320		
Rated Current [A]	20		
Rated Connection Capacity (Solid / standed) [mm <sup>2</sup> ]	2.5.		
Surge Voltage Category Pollution Degree/ Material <sub>2</sub> Group	III / 2 / I		
Frequent Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	J.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	12	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	26 ~ 12		
Rated Tourque [N.m]	J.		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Conductor Material/ plating	M2.5/ Steel / zine plating		
Shrapnel	Stainless Steel		
Clamp/ plating	Phosphor bronze / tin plated		