


## VSP002D-2.5




### ORDER CODE

<b>VSP002D-2.5</b>	-	<b>XXP</b>	-	<b>1Y</b>	-	<b>00A</b>
--------------------	---	------------	---	-----------	---	------------

Serie	no. of poles	pitch /color	special
	02 ~24P	1 = single pitch 2 = double pitch	A = customized

Y:	
1 = green	6 = red
2 = blue	7 = transparent
3 = black	8 = white
4 = grey	9 = yellow
5 = orange	Y = mixed (on request)

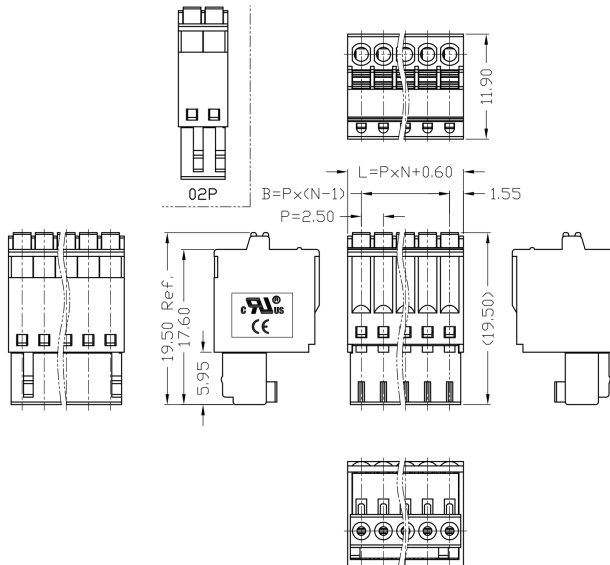

### TECHNICAL DATA

Test Standard	IEC 60998-2-1 / UL 1059		
Pitch [mm]	2.50		
No. of Poles	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	250		
Rated Current [A]	5		
Rated Connection Capacity (Solid / standed) [mm <sup>2</sup> ]	2.5		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequent Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	J.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	150	J.	150
Rated Current [A]	4	J.	4
Rated Connection Capacity (Solid / standed) [AWG]	26 ~ 20		
Rated Torque [N.m]	J.		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	7mm		
Plastic Material Imflammability Class	POM UL94 V-2		
Button Material	J.		
Shrapnel	Stainless Steel		
Clamp/ plating	Phosphor bronze / tin plated		