


VSP002RHW-3.5



ORDER CODE

| | | | | | | |
|----------------------|---|-------------------------|---|--|---------------------------|---------------------------|
| VSP002RHW-3.5 | - | XXP | - | 1Y | - | 00A |
| Serie | | no. of poles 02 ~24P | | pitch /color 1 = single pitch 2 = double pitch | | special A = customized |
| | | | | Y: | | |
| | | | | 1 = green | 6 = red | |
| | | | | 2 = blue | 7 = transparent | |
| | | | | 3 = black | 8 = white | |
| | | | | 4 = grey | 9 = yellow | |
| | | | | 5 = orange | Y = mixed (on request) | |

3.70±0.30

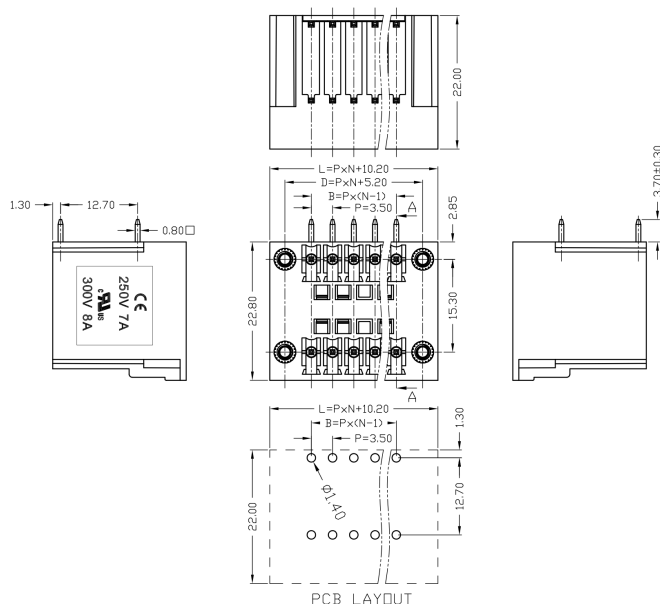

TECHNICAL DATA

| | | | |
|--|-------------------------|----|-----|
| Test Standrad | IEC 60998-2-1 / UL 1059 | | |
| Pitch [mm] | 3.50 | | |
| No. of Pols | 02 ~ 24 P | | |
| IEC 60998-2-1 | | | |
| Rated Insulation Voltage [V] | 250 | | |
| Rated Current [A] | 7 | | |
| Rated Connection Capacity (Solid / standed) [mm] | J. | | |
| Surge Voltage Category Pollution Degree/ Material ₂ Group | III / 2 / I | | |
| Frequente Voltage [V] | AC 2500V 1Minute | | |
| Rated Surge Voltage [V] | 4000 | | |
| Rated Torque | J. | | |
| UL 1059 | | | |
| Use Group | B | C | D |
| Rated Insulation Voltage [V] | 300 | J. | 300 |
| Rated Current [A] | 8 | J. | 8 |
| Rated Connection Capacity (Solid / standed) [AWG] | J. | | |
| Rated Tourque [N.m] | 3.54 | | |
| OTHER DATA | | | |
| Ambient Temperature [°C] | -40°C ~ +105°C | | |
| Stripping length | J. | | |
| Plastic Material Imflammability Class | PA66 UL94 V-2 | | |
| Fixing hole screw Material/ Plating | M2.5/ Copper Alloy | | |
| Conductor Material / Plating | Copper Alloy tin plated | | |
| Clamp/ plating | J. | | |