


# VSP002SHNM-3.5



## ORDER CODE

<b>VSP002SHNM</b> - <b>3.5</b>	-	<b>XXP</b>	-	<b>1Y</b>	-	<b>00A</b>
Serie	no. of poles 02 ~24P	pitch /color 1 = single pitch 2 = double pitch	special A = customized			
		Y: 1 = green 2 = blue 3 = black 4 = grey 5 = orange	6 = red 7 = transparent 8 = white 9 = yellow Y = mixed (on request)			

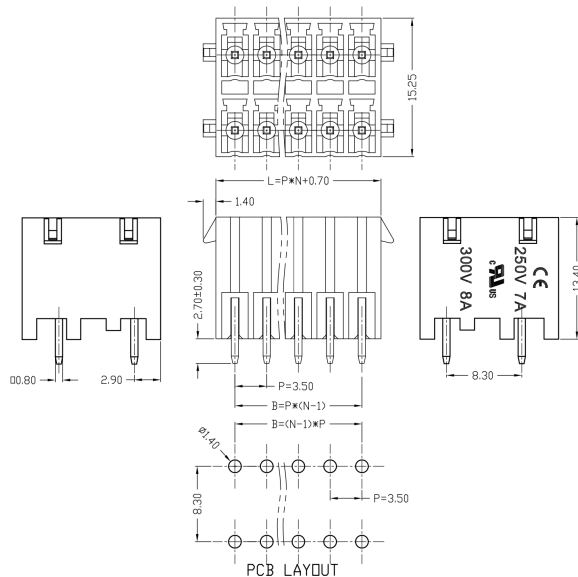

## TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	3.50		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	250		
Rated Current [A]	8		
Rated Connection Capacity (Solid / standed) [mm ]	J.		
Surge Voltage Category Pollution Degree/ Material <sub>2</sub> Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	J.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	8	J.	8
Rated Connection Capacity (Solid / standed) [AWG]	J.		
Rated Tourque [N.m]	3.54		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Fixing hole screw Material/ Plating	J.		
Conductor Material / Plating	Copper Alloy tin plated		
Clamp/ plating	J.		