


VSP002SHNMW-3.5




ORDER CODE

VSP002SHNMW-3.5	-	XXP	-	1Y	-	00A
-----------------	---	-----	---	----	---	-----

Serie	no. of poles	pitch /color	special
	02 ~24P	1 = single pitch 2 = double pitch	A = customized

Y:	
1 = green	6 = red
2 = blue	7 = transparent
3 = black	8 = white
4 = grey	9 = yellow
5 = orange	Y = mixed (on request)

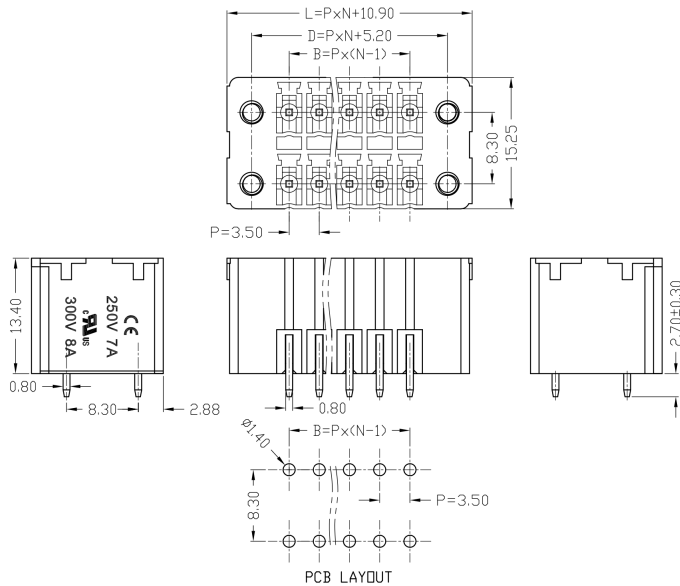

TECHNICAL DATA

Test Standard	IEC 60998-2-1 / UL 1059		
Pitch [mm]	3.50		
No. of Poles	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	250		
Rated Current [A]	7		
Rated Connection Capacity (Solid / standed) [mm ²]	J.		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	J.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	8	J.	8
Rated Connection Capacity (Solid / standed) [AWG]	J.		
Rated Tourque [N.m]	3.54		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Fixing hole screw Material/ Plating	M2.5/ Copper Alloy		
Conductor Material / Plating	Copper Alloy tin plated		
Clamp/ plating	J.		