


VSS145HWP

VISIONCON.
Connector Systems & Solutions



ORDER CODE

VSS145HWP	-	XXP	-	1Y	-	00A
Serie		no. of poles		pitch /color		special
		02 ~12P		1 = single pitch		A = customized
				2 = double pitch		
				Y:		
				1 = green	6 = red	
				2 = blue	7 = transparent	
				3 = black	8 = white	
				4 = grey	9 = yellow	
				5 = orange	Y = mixed (on request)	

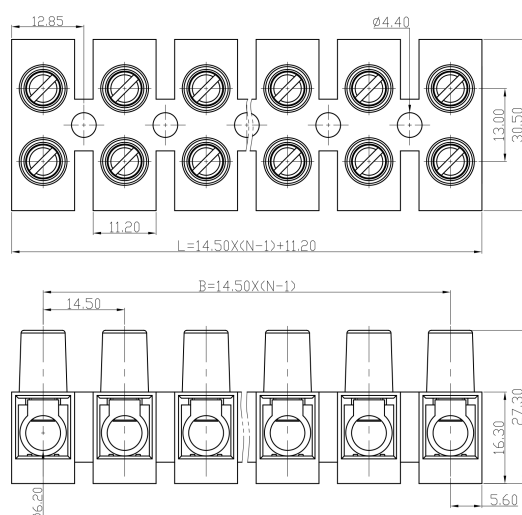

TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	14.5		
No. of Poles	02 ~12 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	1000		
Rated Current [A]	75		
Rated Connection Capacity (Solid / standed) [mm ²]	16.0		
Surge Voltage Category Pollution Degree/ Material Group	III / 2 / I		
Frequente Voltage [V]	AC 3000V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	2.0		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	600	J.	600
Rated Current [A]	65	J.	5
Rated Connection Capacity (Solid / standed) [AWG]	14 ~ 6		
Rated Tourque [N.m]	17.54		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping Length [mm]	7 ~8		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	Steel / Zn plated		
Conductor Material / Plating / Wire Protection	Copper Alloy Ni plated / Stainless Steel		