

BY NELLO WALL

CLARITY's Convertible Pull Handle System: Change from a Non-Locking to a Locking Pull Handle using the Same Glass Door - on site and with minimal cost or disruption.

**CONVERT** a Glass Door from Non-Locking to Locking without buying a new door. It is a truly flexible system, as the locking and non-locking handles use the same holes in the glass door.

**UNIFORM DESIGN** appearance along aisles of glass office fronts. The aisle side of the standard handle is 44" high and at ADA clearance height.

ACCOMMODATING to all key systems in the locking handle. The system's handle accepts a rim cylinder which can be keyed by security to the building standard/master key system required by fire codes.

### **FINISHES AND HEIGHTS**

Available in CLARITY standard pull handle finishes: Brushed Stainless/Black/White/Bronze. Custom handle heights available to complete a design concept.














# **CLARITY Convertible Pull Handle System**

CHANGE NON-LOCKING TO LOCKING ON THE SAME GLASS DOOR

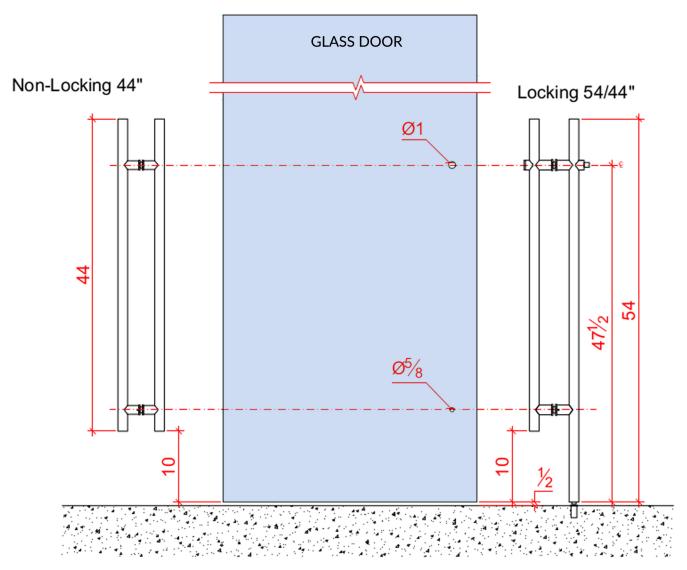

## LOCKING HANDLE FEATURES

Rim cylinder is provided to fit the building locking/keying system. Security supplies lock cores keyed to the confidential building master key. Lever turns 180 degrees to offer ADA & single motion unlocking. Key cylinder and lever are 48" above finished floor for ADA compliance.

COMMON FEATURES OF NON-LOCKING AND LOCKING HANDLES Uniform appearance since both have 44" high on aisle side. 1-3/8" diameter tubes, top post and bottom posts. Common mounting holes in glass - Top 1" & Bottom 5/8" Aisle side mounts 10" above floor for ADA compliance.

### **DESIGN OPTIONS**

Finishes: Brushed Stainless, Matte Black, White & Bronze. Custom finishes and longer handle sizes available.