

CLARITY

BY NELLO WALL

HYDRAULIC PATCH






HYDRAULIC AUTO PATCH

Product Specification

- Suitable door weight: Max 100kg
- Suitable door width: 750~1000mm
- Suitable door thickness: 8~13mm
- Ambient temperature: -20°C~+50°C
- Quick and easy installation
- Compliant as per **EN1154** European Standards





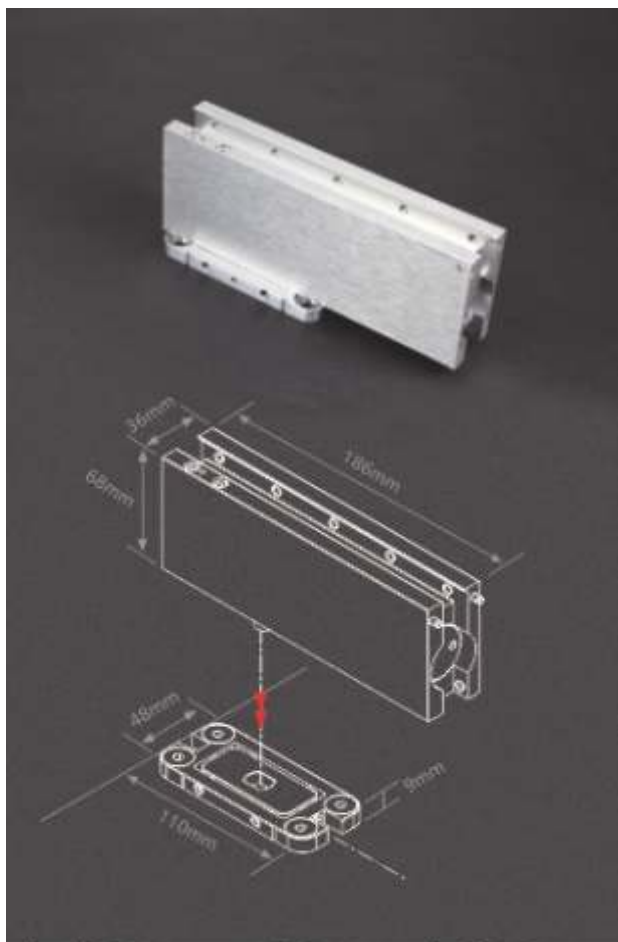

1

Max. opening angle: 150° for
left and right opening (double action)

Hold open at 90°

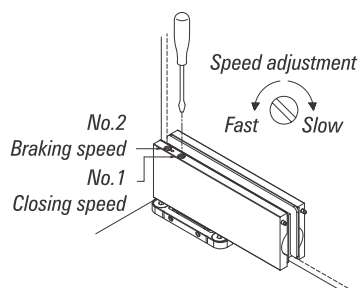


2

Two speed adjustment
Closing Speed (150° ~ 10°)
Braking speed (10° ~ 0°)

3

With high efficiency over
70%, light opening yet with
smooth closing

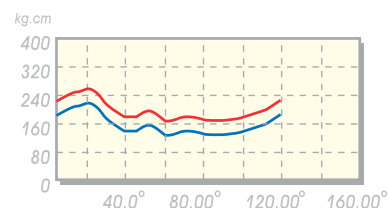

Quick and easy installation with smooth movement

- No need to have the pre-set on the floor
- Easy installation with base seat adjustable
±3mm backward and forward
±3mm left and right, and for 4° alignment adjustment





DATA AND FEATURES

Suitable door width	door weight	Item No.
750~1000mm	≤ 100kg	
Body dimensions (mm)	Length	186
	Width	68
	Thick	36
Angle of opening		150°
Closing speed adjustable		✓
Braking speed adjustable		✓
Non Handed		✓


✓ =yes x=no

Finish

BSS Brushed Stainless Finish.

MBLK Matte Black Finish.

Other finishes to order

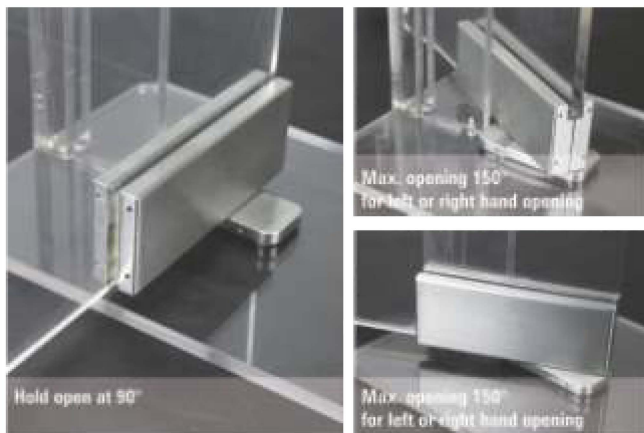

Door Control devices and solutions. A constant endeavor to upgrade and innovate has made us a successful name worldwide.

The manufacturing process of Door Control devices employs high-precision CNC computer-controlled robotics, combined with automation and technical know-how under a strict quality check system. The products conform to International Standards of fire and safety and also meet ISO 9001 & British BSI standards for its quality management systems.

Hydraulic Auto Patch is the most innovative offering till date. This revolutionary fitting is a Bottom Patch fitting used in frameless glass doors with an in-built hydraulic system. Therefore the fitting does not require any floor spring to move the door and omits the requirement of a preset (cut required for mounting a floor spring) on the floor. This makes the door installation very easy and also makes possible a clean seamless floor.

Hydraulic Auto Patch is complaint as per EN 1154 European Standards and is tested for long life and remarkable performance.

HYDRAULIC PATCH



HYDRAULIC PATCH

New Generation Door Control Device



Installation

