


Type: _____ Model: _____

Project: _____



LARGE METRO

LED Pendant Mount

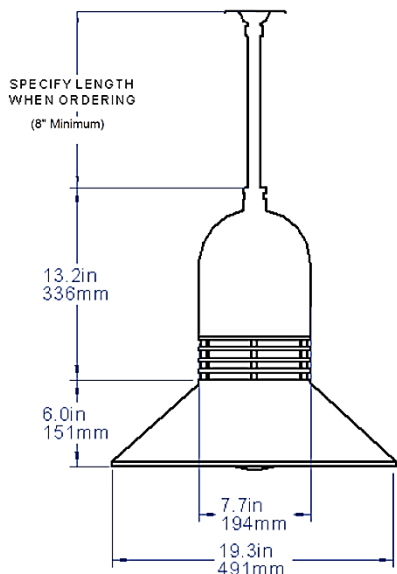

General: The updated classic style of the Large Metro series provides a timeless visual while providing a suitable uplight component. Appropriate for pedestrian scale installations, the stacked decorative rings provide an aesthetic appeal.

Construction: Top, housing, and mounting gear are constructed of low copper content cast aluminum. Shade shall be spun aluminum. Stainless steel external hardware to protect against the exterior elements.

Lens: Glass globe available in opal (-OL) or clear (-CL).

Tops: Shall be Dome (-D) style to accommodate pendant mount.

LED Light Engine: LED module located in housing with LED modules offered in lumen (typical) package of 3,750. Available in color temperatures of 3000K, 3500K, 4000K, and 5000K. CRI > 80 minimum.

Driver: Constant current LED driver; input voltage of 120v to 277v, mounted internal to fixture.

Heat Sink: Finned heat sink shall be extruded aluminum and shall be located in housing above LED module.

Mounting: For use with Pendant Mount Kit accessory. Ordered separately and in various lengths, Pendant Mount Kit required for complete installation. For custom pendant requirements – consult factory.

Finish: Textured polyester powder coat finish. Shade underside is standard white finish. Black, bronze, grey, white, silver, and verde green options available. For woodgrain finish and custom colors, consult factory.

Gaskets: EPDM gaskets standard.

EPA and Weight: EPA 0.642ft
Weight 26-1/2 lbs

Listings: ETL Listed to UL 8750. IESNA LM79.



Type: _____ Model: _____

Project: _____



SERIES MOUNTING WATTAGE CCT (kelvin) TOP STYLE LENS VOLTAGE FINISH

FIXTURE DETAIL

SERIES ☐ **LMT** Large Metro Pendant Mount

MOUNTING ☐ **PM** Pendant Mount
for complete installation, please order accessory PMJB, Pendant Mount Kit (see specification sheet for ordering information)

WATTAGE ☐ **37LED** 37 input watts

Nominal Watts	Nominal Lumens	Lumens/Watt (LPW)	CCT (Kelvin)	CRI	Rated Life (L85)	Drive Current (mA)	Nominal Voltage
37	3,700	100	3000	> 80	50,000 hrs	700mA	48.0
	3,750	101	3500				
	3,750	101	4000				
	3,800	103	5000				

COLOR
(kelvin)

☐ **30K** 3000K

☐ **35K** 3500K

☐ **40K** 4000K

☐ **50K** 5000K

TOP STYLE ☐ **D** Dome

LENS ☐ **CL** Clear Glass Globe

☐ **OL** Opal/Translucent Glass Globe

VOLTAGE ☐ **UNV** 120v – 277v; output current 700mA

FINISH

<input type="checkbox"/> BLK	Black finish	<input type="checkbox"/> VGN	Verde Green finish
<input type="checkbox"/> BRZ	Bronze finish	<input type="checkbox"/> WHT	White finish
<input type="checkbox"/> GRY	Grey finish	<input type="checkbox"/> CC	Custom Color – consult factory
<input type="checkbox"/> SIL	Silver finish	<input type="checkbox"/> WGF	Woodgrain finish – consult factory

IES files can be found on website.

Content of specification sheets is subject to change. Please consult website for current product detail.



www.intrigueled.com

N60 W14592 Kaul Avenue Menomonee Falls, WI 53051
P: (877) 965 0005 F: (262) 436 1745