

DESCRIPTION

AMCOM's AM091037PA-P2 is a Power Amplifier module. It is designed for general purpose applications. It operates from 850 MHz to 1000 MHz. The module operates using a 9V supply and uses SMA connectors for input and output.



FEATURES

- Frequency Range: 850-1000MHz
- Gain: 40dB
- Pout: +37dBm
- IP3: +47dBm
- Noise Figure: 6dB
- DC Power: 9V
- SMA Connector

Performance measured @ 925MHz







APPLICATIONS

- Wireless Infrastructure
- Military & Aerospace
- Test and Measurement







Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \Omega$, $V_{CC} = 9V$

Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	850		1000
Small Signal Gain	dB	40	41	
Output Power P_{out} @ $P_{in} = -3dBm$	dBm		+37	
IP3	dBm		+47	
Reverse Isolation	dB		-75	
Noise Figure	dB		6.0	
Efficiency at Pout = +37dBm	%		33	
VSWR				
Input			1.3:1	
Output			1.5:1	
DC Power Supply	V		9	
Supply Current	mA		1650	
Size (Excluding SMA Connector)	inch	3.750" x 2.000" x 1.813"		
Weight	Oz.	8		

Typical Performance @ +25°C

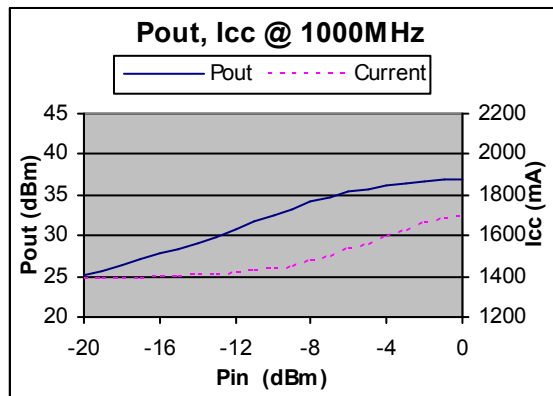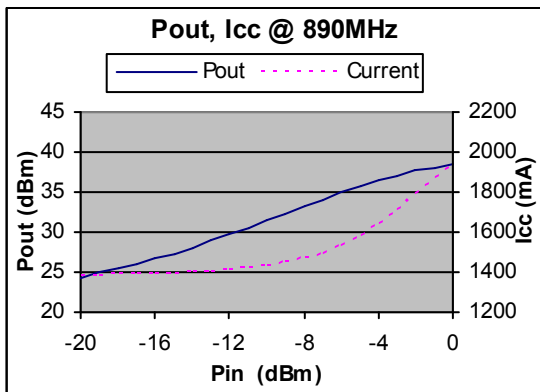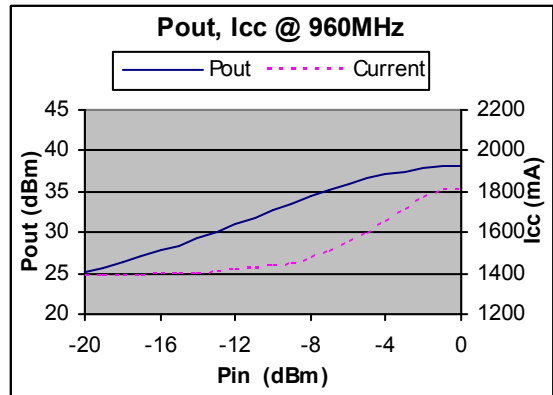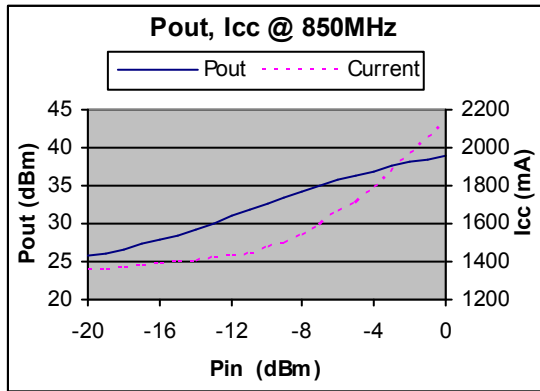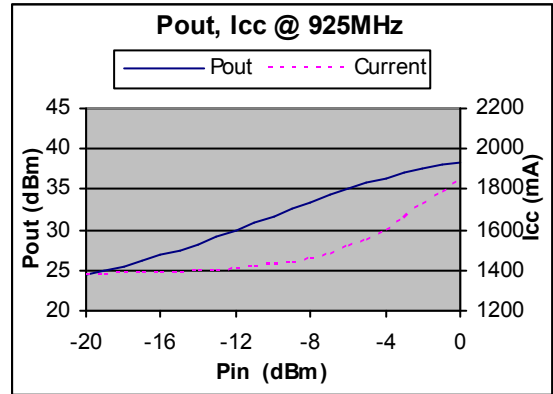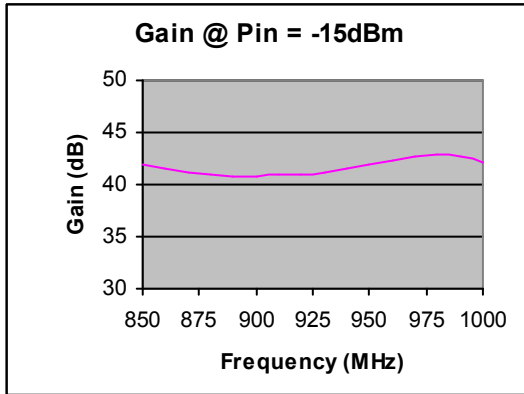


Typical Performance @ +25°C

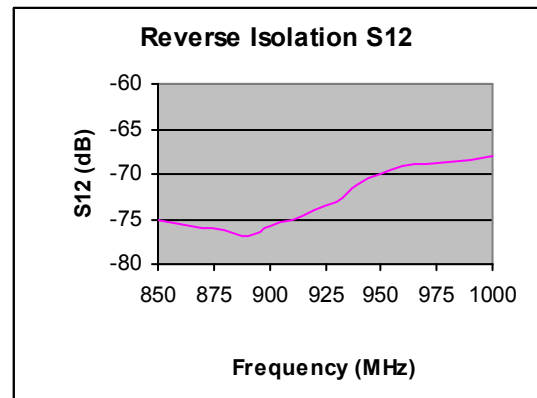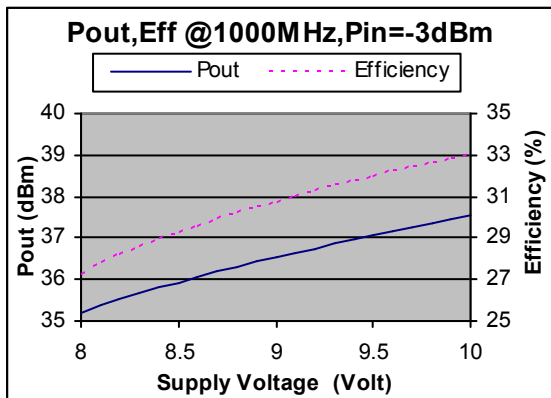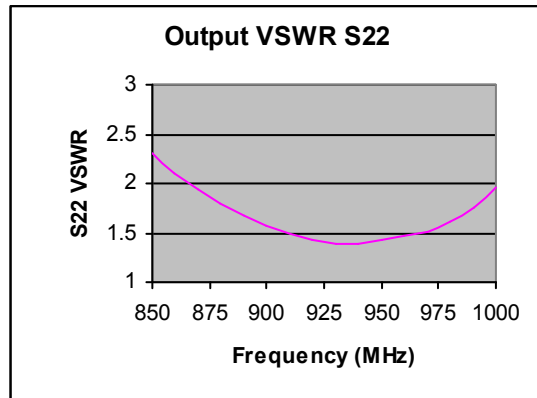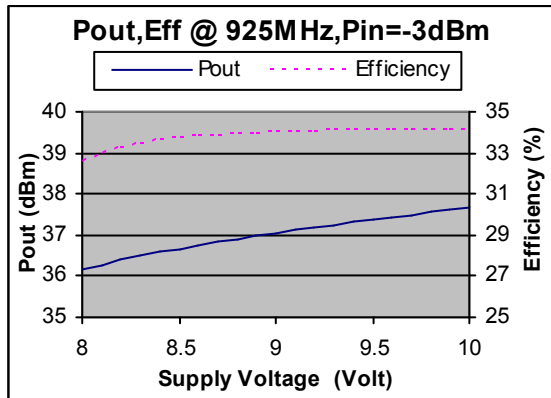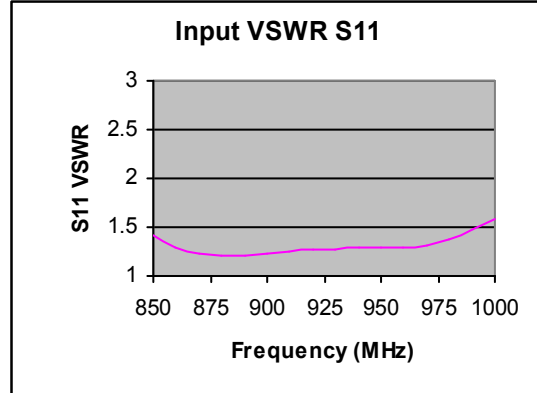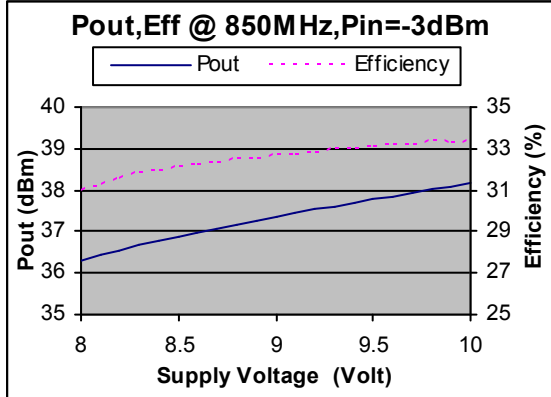

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+12V
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-55 °C to +100 °C

Outline

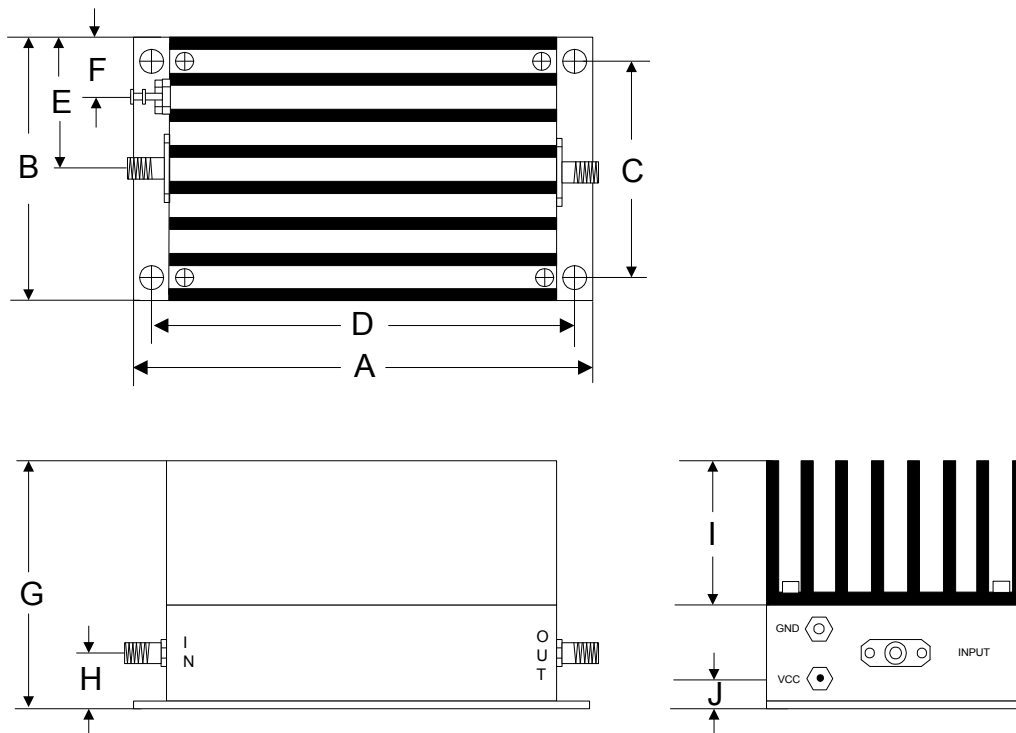

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.813	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	46.05	9.53	25.40	6.03