

VGS005S-5.0




ORDER CODE

VGS005S-5.0	-	XXP	-	1Y	-	00A
Serie	no. of poles	pitch /color	special			
	02 ~24P	1 = single pitch 2 = double pitch	A = customized			
		Y:				
		1 = green	6 = red			
		2 = blue	7 = transparent			
		3 = black	8 = white			
		4 = grey	9 = yellow			
		5 = orange	Y = mixed (on request)			

12.50

3.90±0.30

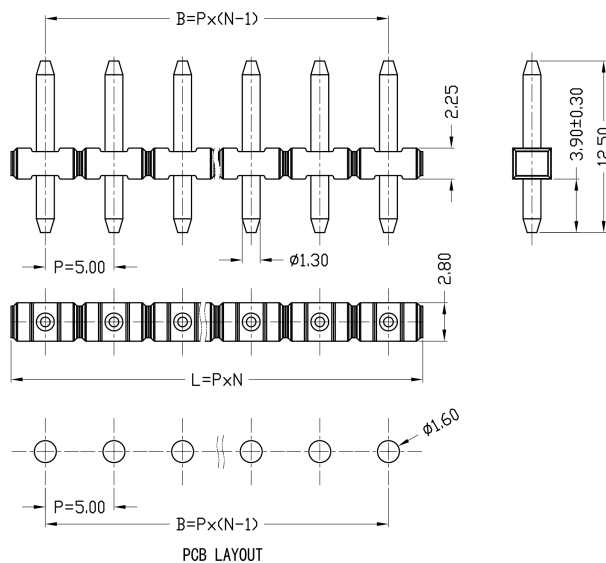

TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	5.00		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	250		
Rated Current [A]	12		
Rated Connection Capacity (Solid / standed) [mm]	J.		
Surge Voltage Category Pollution Degree/ Material ₂ Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	J.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	15	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	J.		
Rated Tourque [N.m]	3.54		
OTHER DATA			
Ambient Temperature [°C]	-30°C ~ +120°C		
Stripping length	J.		
Plastic Material Imflammability Class	PBT UL94 V-0		
Screw/ Material/ Plating	J.		
Conductor Material/ plating	(Copper alloy)/ Nickel plated		
Clamp/ plating	J.		