



VSP001F-5.08



ORDER CODE

VSP001F-5.08	-	XXP	-	1Y	-	00A
Serie		no. of poles 02 ~24P		pitch /color 1 = single pitch 2 = double pitch		special A = customized
						
SECTION A-A						
Y: 1 = green 2 = blue 3 = black 4 = grey 5 = orange 6 = red 7 = transparent 8 = white 9 = yellow Y = mixed (on request)						
30±0.30						

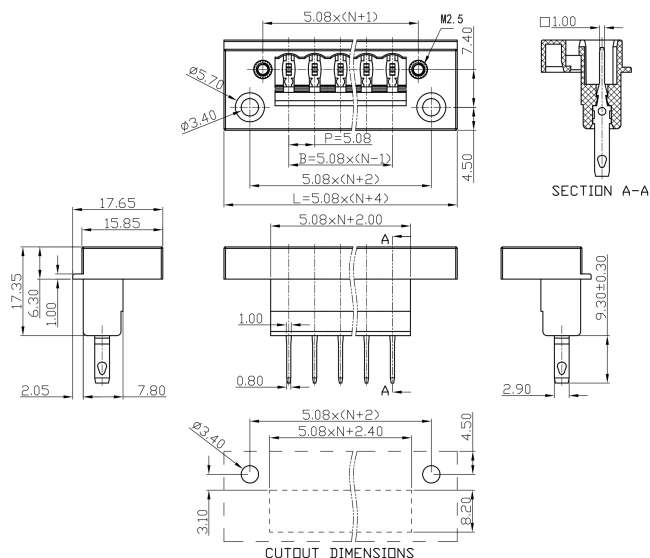

TECHNICAL DATA

Test Standrad	IEC 60998-2-1 / UL 1059		
Pitch [mm]	5.08		
No. of Pols	02 ~ 24 P		
IEC 60998-2-1			
Rated Insulation Voltage [V]	320		
Rated Current [A]	20		
Rated Connection Capacity (Solid / standed) [mm]	J.		
Surge Voltage Category Pollution Degree/ Material ₂ Group	III / 2 / I		
Frequente Voltage [V]	AC 2500V 1Minute		
Rated Surge Voltage [V]	4000		
Rated Torque	J.		
UL 1059			
Use Group	B	C	D
Rated Insulation Voltage [V]	300	J.	300
Rated Current [A]	16	J.	10
Rated Connection Capacity (Solid / standed) [AWG]	J.		
Rated Tourque [N.m]	J.		
OTHER DATA			
Ambient Temperature [°C]	-40°C ~ +105°C		
Stripping length	J.		
Plastic Material Imflammability Class	PA66 UL94 V-2		
Screw Specification Material/ Plating	J.		
Conductor Material / Plating	M2.5/ Copper Alloy		
Fixing Hole Screw Specification/ Material	Phosphor bronze / tin plated		